Siemens Home Appliances catalogue is printed in an environmentally conscious way, using inks containing linseed oils and stock manufactured to high environmental standards.

This material is printed on Quatro Silk, manufactured by Sappi Paper at their EMAS Mill. The pulp for this paper is sourced from certified and well managed sustainable plantation forests. EMAS is the European Union's regulated environmental management scheme.

The company that printed Siemens Home Appliances catalogue has a strict environmental policy. They use initiatives such as computer-to-plate technology, water/isopropyl alcohol reductions in printing presses and recycling throughout the organisation. This is in addition to the ink selection as discussed above and in their advice to all clients on the environmental implications of paper selection and usage.

BSH Home Appliances Pty Ltd

7-9 Arco Lane
Heatherton VIC 3202

Phone: 03 8551 1100
Fax: 03 8551 1182

www.siemens-home.com.au

Printed in Australia
KRD 11/2009 – BH 816 S

Important Notes:

Certain appliances shown in this catalogue are not available in your country. Model numbers and specifications are for reference only and subject to change without prior notice. Please contact your local Siemens retailer for the latest information.

Siemens is continuously seeking to improve specification, design and production to its appliances and alterations may take place regularly.

All descriptions and installation diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction manual supplied with the appliance.

The electrical and gas connection should only be made in accordance with the regulations of the national authorities.

Right of technical modification reserved, delivery subject to availability. Due to variation in photographic and printing processes, colours of actual products may vary slightly from illustrations. ®Registered trademark.

©2009 by BSH Home Appliances Pty Ltd. Reproduction, complete or in part, only with the express permission of the publisher.
Printed in Australia.

BSH Home Appliances Pty. Ltd. ABN 22 109 198 405

Whilst every care has been taken in the preparation of this publication, BSH Home Appliances Pty Ltd does not warrant the accuracy or completeness of the information in this publication and BSH Home Appliances Pty Ltd reserves the right to alter specifications without notice. To the extent permitted by law, BSH Home Appliances Pty Ltd excludes all liability, including negligence, for any loss incurred in reliance on the contents of this publication.

The new range of Siemens Home Appliances

2009/2010

The future moving in.

SIEMENS

Welcome to a world of innovation. Welcome to Siemens.

Siemens is the great, innovative technology brand in the home appliances sector. The name stands for outstanding engineering achievements, characterised by creativity, perfection and precision. For more than 160 years now, these values have shaped the Siemens brand. They provide the basis for a continuous flow of innovations, which have constantly improved people's lives. "Progress in the service of mankind" was the aspiration of the company's founder, Werner von Siemens. With this goal in mind, our engineers continuously endeavour to make technical advances on the performance and efficiency of home appliances, including the optimised use of resources such as water and energy. Continuing to apply new technologies has ensured Siemens appliances are amongst the most resource-efficient in the market. As Germany's and Europe's number 1 brand of built-in appliances, Siemens make technical progress something that everyone can experience directly. **Siemens. The future moving in.**

Germany's No 1 built-in brand: GfK Sales Value % Jan-Aug 09.
Siemens 5 Year Warranty: Please refer to www.siemens-home.com.au for full terms and conditions.

Excellence in Design

At Siemens, our aim is to create a product that emphasises the value of the technology through its visual aesthetics. With its timeless, modern design language, flawless structures and basic geometrical shapes, Siemens succeeds in creating optimum function while satisfying both a demanding and individual lifestyle.

For years, Siemens has continued to remain at the forefront of design and has received awards from major design names internationally.

The iF award is an important indication of outstanding product quality and Siemens receives an iF award every year. The reddot award ranks among the largest, toughest and most prestigious design competitions ever. Selected appliances from Siemens' latest range have received the 'best of the best' award – one of the most coveted honours reddot can bestow.

product design award 2009

reddot design award winner 2009

reddot design award best of the best 2008

Design Center Stuttgart

Siemens appliances save resources through innovation

Everyday, we work to reduce your utility bills.

On average, there are four major domestic appliances in every Australian household. With approximately eight million households, there are around 32 million home appliances, which are responsible for approximately a third of the energy and water consumption. That's a lot of appliances and a lot of resource consumption. At Siemens, we want to do our best and conserve as much of the natural resources by delivering innovative products. On the following pages, you will discover some of the most energy and water efficient appliances available to you and your home. We will show you how – with the right household appliances – you can take care of the environment and your own expenses.

Source: Australian Bureau of Statistics 2005, ENVIRONMENTAL ISSUES: PEOPLE'S VIEWS AND PRACTICES, Cat. no. 4602.0, ABS, Canberra.

Preserving resources for future generations

At Siemens, we are aware of climate protection and the importance of developing resource-efficient appliances. We believe that high-performance appliances and lower energy consumption are by no means mutually exclusive. That's why we take resource efficiency very seriously, to the extent that our appliances have gained ranks amongst the most energy and water efficient in their class. With that in mind, we will continue to develop innovative appliances with cutting-edge technology to ensure the highest efficiency. As part of our commitment, appliances with high resource efficiency prominently show the Siemens ecoPLUS label.

Household appliances product life cycle

Production
(raw materials, energy and water consumption)
4 – 9%*

Raw materials
(non-ferrous metals, steel, plastic, glass, other)

Distribution
(energy consumption for transporting the item)
< 0.5%

Based on appliances sold in Europe, about 90% of the total environmental impact of household appliances occurs during the appliance's long service life.

This is why the development of resource-saving products is Siemens' most enduring contribution to protecting the environment.

Disposal
(energy consumption for recycling)
< 0.5%

Operation
(water, energy and chemical use)
90 – 95%*

* According to product and usage. Percentages expressed in the above diagram apply to appliances sold in Europe. Percentages for distribution and disposal may vary for other countries. Source: Bosch-Siemens Household Appliances, Munich – 2007 Environmental Report.

Changes in the energy and water consumption of Siemens home appliances from 1994 until 2009

Development of consumption figures for electric ovens

Measures aimed at improving efficiency include:

- Energy-optimised cooking functions
- Oven doors with insulated glazing
- Improved insulation
- More efficient ventilation systems
- More energy-efficient components, e.g. lamps



Development of consumption figures for washers

Measures aimed at improving efficiency include:

- High efficiency pump motors
- Efficient heating technology
- Improved filter technology
- Optimised water distribution

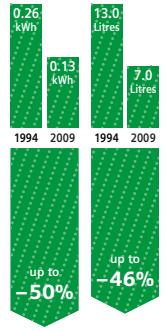

Development of consumption figures for dishwashers

Measures aimed at improving efficiency include:

- Consumption-optimised wash programs (in conjunction with new detergents)
- aquaSensor: saves water and time
- Flow-through sensor: Water quantity is precisely regulated
- autoLoad: time and water quantity is automatically adjusted to the load size

Development of consumption figures for fridge-freezers

Measures aimed at improving efficiency include:

- Advanced compressor technology
- Improved insulation
- Optimised evaporators
- Reduced consumption of fans, electronics and other internal functions



Comparison between the consumption values for each product category in 2009 with the similarly determined consumption values for a comparable appliance produced in 1994.

Source: BSH Bosch und Siemens Hausgeräte GmbH

Table of contents

Built-in appliances from Siemens.
The future moving in.

Ovens 12-33
- Ovens
- liftMatic
- Accessories

Compact Appliances 34-49
- Combi-Steamer
- Combi-Microwave
- Microwave
- Coffee Machine
- Warming Drawers
- Accessories

Cooktops 50-71
- Induction
- Ceramic
- Gas
- Domino
- Accessories

Rangehoods 72-83
- Canopy
- Slideout
- Accessories

Refrigeration 84-103
- aCool
- Refrigerator
- Wine Cooler
- Accessories

Dishwashing 104-119
- Dishwashers
- Accessories

Technical Diagrams 120-129

Contact Siemens 130

Customer Care 131

Express your creativity when baking, steaming, roasting...

Cooking is one of humanity's first creative acts. So it's high time to provide plentiful and attractive space for the culinary arts. We'd like to invite you to celebrate the joy of cooking and savor its results using the new, built-in appliance series by Siemens. Our new appliances not only offer technological delicacies such as hydroBaking, 3D hotair plus, cookControl, or the innovative lightControl concept, they also serve up contemporary and timeless designs that will make your mouth water long before it's time to eat. With clear lines and structures and an inspiring light design, your kitchen will show you new horizons. The path to this dream starts here.

More functions. Less fuss. Introducing the new lightControl fascia panel

When cooking, many people rely on their feelings – from the time they go shopping until the last taste. The Siemens lightControl concept applies that intuitive approach to the operation of built-in appliances. That's because, even when using top-quality technology, cooking should always leave room for emotion and spontaneous ideas. That flexibility begins when you turn on any Siemens appliance. The on/off button ensures not only greater safety, but also better energy efficiency. In just a second – with the press of a button – you have all the functions of the appliance at your fingertips. The central, retractable control dial and the push buttons arranged from left-to-right, will make cooking easy and intuitive. Thanks to the uniform lightControl concept, you'll feel comfortable using any Siemens built-in appliance.

product design award 2009

Stainless steel surfaces

Professional cooks know that the presentation of a dish is as important as its perfect preparation. Siemens appliances are designed according to this very similar principle: The high-grade stainless steel isn't used on just the obvious surfaces. This high-quality material wraps gracefully around the door of the Siemens oven, extending to the lateral inner edges. And that love of detail does more than convey absolute quality – it also allows for the perfect visual coordination of appliances.

A brilliant example of design and function – the illuminated control dial

As soon as you turn the appliance on, the contours of the control dial are lit in a cool, elegant blue. This top-quality control element isn't just attractive to the eye, you can feel its qualities at every turn because it's also made of metal. It's also there for added safety – if the dial is retracted into the panel, it means the appliance is turned off.

Please check individual specifications for this feature.

Clock display

Siemens clearText ovens provide three different clock designs, allowing you to customise the display that suits you. You can also choose to display the time in digital format, or, if you prefer, you can disable the clock display function completely.

Convenience in a new light

The blue-lit controls and the high-contrast graphic display are truly eye-catching. During the cooking process, the blue-illuminated buttons provide easy-to-see information; including the current active functions.

Automatic programs made even easier with cookControl

Haute cuisine can be very simple these days. That's because the automatic cookControl features up to 68 programs that you can use to prepare perfect meat, fish, and vegetable dishes, as well as gratins. It's easy to use – just select the program, enter the food weight, and set your preferences (such as medium or rare). The oven does the rest for you.

Crispy on the outside. Luscious on the inside. Introducing hydroBaking from Siemens.

hydroBaking is the best possible type of heating for every food that must be both luscious and crispy. Thanks to hydroBaking, the moisture that is drawn out of baked goods remains in the oven as steam. hydroBaking works particularly well for sweet yeast doughs, bread, rolls, sponge cake, choux pastry and much more.

Ideal for the best baking results – 3D hotAir plus

Whether it's pizza, cookies or cakes, 3D hotAir plus provides the best type of heating to achieve perfect baking results. And you'll get those results whether you need a single baking sheet or several. For moister foods like pizza or fruit pies, you can bake on two shelves simultaneously. Or, to bake dry pastries like cookies and rolls, you can even use up to three shelves. The oven's innovative heat distribution ensures a perfect result whether you use one, two or three shelves.

Information in black on white and white on black. The new clearText display.

It's pretty easy to keep track of things while you're cooking, thanks to the informative graphic display of the fascia panel. The large letters and the alternating black and white background of the display illustrate the current settings, in addition to the current time, program status, and other details. The information displayed on a white background shows you the settings you can change. The black background indicates settings that are not currently active.

Child safety lock

The childproof setting is a practical safety feature on our ovens. It stops curious little fingers inadvertently activating the oven. Simply pressing the key symbol for approximately four seconds activates the safety lock, which disables the control functions of the oven. To remove the lock, repeat the process.

Interior

A smooth, contemporary grey enamel is at the heart of our ovens. The unique coating is designed to be scratch-resistant, long-lasting and can withstand chemical erosion from things like fruit juice. Each roasting and grill pan is also treated with the same protective coating. This, together with the improved oven lighting, provides better illumination of the oven cavity.

Cooling fan

The integrated cooling fan is designed to keep the control panel operating components cool and also helps reduce the temperatures on both the oven door and any adjacent cabinetry.

Recessed grill element

We recessed the grill element into the roof of the oven. Not only does this make for energy efficient grilling, it also leaves more room inside the oven and minimises any accidental contact with the heating element.

Fully extendable telescopic pan set

The retractable pan set consists of a wire shelf and three telescopic shelf rails. Designed for use above the first shelf level, the back of every shelf can now be accessed with ease for greater convenience. With an integrated safety stop, the pan set is safe-to-use and also supports cookware placed directly onto the pan.

Designed for the eye and the hand – the stainless steel Profi-handle

When it comes to appearance and surface feel, the Profi-handle leaves nothing to be desired. High-quality stainless steel is used throughout the handle elements, creating a timeless design that is smooth to the touch and visually appealing.

A large oven cavity means more room for enjoyment

With 63-litre oven cavity and a choice of five shelf levels, you can make the most of the larger capacity and even cook on three levels simultaneously.

Choice of door design options

The side-opening door offers unobstructed access to the oven. Opening a full 160°, it is available with right or left hinge options so you can fit two ovens side-by-side. The classic bottom-hinged door design works for both built-in and built-under installation.

Electronic controls

Siemens ovens are designed to be intuitive and simple to use. The hi-precision electronic temperature sensor is accurate right down to the last few degrees. With a range from 30°C to 300°C, the sensor is able to maintain an accurate temperature level, which means the ultra-low temperature required for producing yoghurt is just as precisely maintained as the 200°C for baking bread.

Please check individual specifications for this feature.

Automatic temperature display

Depending on the cooking function you choose, the oven will automatically suggest the ideal temperature to produce optimum results. For additional control, the temperature can be manually adjusted using the central control dial or the +/- keys.

Please check individual specifications for this feature.

Sabbath setting

This function is designed to keep pre-heated food warm for between 24 and 73 hours, depending on the selected setting. When activated, the oven automatically chooses the conventional heat setting at 85°C and ensures the oven light is switched off for the duration of the program.

Please check individual specifications for this feature.

Memory

You can store your most commonly used program by selecting the cooking function, temperature and duration into the 'M' button. This automatically stores the process in the oven's memory and allows you to recall at the touch of a button.

Please check individual specifications for this feature.

M

cookControl

cookControl from Siemens allows for the simple and trouble-free cooking of stews, casseroles and roasts. All you have to do is select the desired program from the menu and enter the weight. The oven will automatically select the cooking function, temperature and time. You can, if you want, adjust the program to suit your personal taste. Depending on the model, cookControl offers 40 or 68 specially and intensively tested programs, focusing on meat, poultry, fish, stews and casseroles.

Please check individual specifications for this feature.

P

Auto fan shut-off

If you open the oven door during cooking, the oven sensor automatically shuts off the 3D hot air fan, which prevents the release of built-up heat.

Please check individual specifications for this feature.

The ultimate in interior lighting

Because it gives off an extra bright, crisp, white light, the halogen interior light has many advantages over standard lights. It's perfect for illuminating large interiors for a clear view of the contents.

Please check individual specifications for this feature. Excludes liftMatic.

Fast pre-heating function

Siemens have now made fast pre-heating available on all multi-function models. This uses all the heating elements at full power to heat up the oven. Once the required temperature is reached, an alarm signal sounds and the oven automatically reverts to the chosen cooking mode.

Oven residual heat indicator

With the residual heat indicator bars, the temperature of the oven remains visible even after the oven has been switched off. Once all bars have cleared, the residual temperature will be under 60°C. For meals with long cooking times, you can switch off the oven 5-10 minutes earlier and use the residual heat to cook the rest of the meal, helping save energy.

Please check individual specifications for this feature.

Quadruple glazed coolTouch door

All ovens come with quadruple glazed doors to ensure that door surface temperatures are kept as low as possible. The reflective inner glass is designed to keep the heat in, while providing a safe-to-touch door on the outside.

Door lock (activeClean models only)

When the activeClean function is selected, the oven door automatically locks once the temperature reaches 300°C. You can also program the activeClean oven so that the door locking function is linked to the safety door lock. For example, if the safety door lock is activated, the door will also lock once the temperature exceeds 50°C.

Automatic safety switch-off

Your Siemens oven also includes an automatic switch-off function. This safety feature is activated when a cooking time has not been set and the settings remain unchanged for an extended period of time. Once activated, the words 'Automatic switch off' will appear in the clearText display and automatically switch off the oven (a symbol appears on models without clearText).

To cancel the shut-off and re-set the oven, you simply press any button. The point at which the automatic safety switch-off is activated depends on the selected temperature or grill setting.

Please check individual specifications for this feature.

Removable door

If required, all Siemens bottom-hinged oven doors can be easily removed for cleaning or to gain better access to the oven interior for cleaning.

Never clean again: activeClean®

Siemens now offers an innovative feature when cleaning an oven is too much of an effort. Welcome to activeClean®, the self-cleaning oven system from Siemens. The push-button cleaning process superheats the oven to approximately 500°C and burns off any deposits from baking, roasting and grilling. The result is a perfectly clean oven and a residue of fine ash that is easily removed with a damp cloth, without using any detergents. As a safety measure, the oven door locks automatically during the cleaning process and remains locked until the oven has cooled to a safe level. The whole process takes 1-2 hours, depending on the degree of soiling and can even be programed to run overnight using the delay timer function. With its unlimited lifespan, coupled with the guarantee that all cavity surfaces, including the oven base, door and roasting pan will be cleaned to perfection, it is clear to see why the Siemens activeClean® system is so popular. Replace arduous scouring, oven sprays and other chemical cleansing agents with activeClean®.

The oven must be fitted with accessory supports to clean roasting pan with activeClean®.

ecoClean liners

The specially developed liners are designed to be mounted on the sidewalls, back and roof of the oven cavity. During the cooking process, grease and fat deposits are absorbed into the liners and dispersed around the microscopic ceramic spheres, which are designed to reduce cooking odours. During the cleaning cycle, the oven is heated up to a temperature of approximately 270°C, causing the release of oxygen from the spheres. This process forces traces of grease and waste deposits on the lining to break down or oxidise, leaving the ecoClean liners renewed.

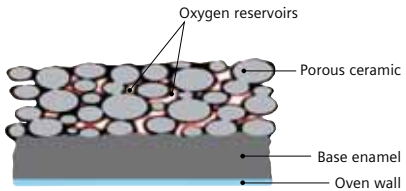

Food in motion – The Siemens liftMatic

We wondered how we could improve a wall oven. Our quest took us in a new direction. We thought differently and the outcome is a world innovation with a revolutionary concept: the Siemens liftMatic wall oven. With just one touch of a button, the oven can be opened or closed – the base slides up and down. Experience world innovation at its best.

Integrated lift-function

Accessing your food has never been so easy. The built-in lift lowers the entire base of the oven over the working surface, providing access from all three sides – without the interference of a door. Depending on the placement of the oven, the two different speeds for the lift function and distance of travel can be programed to suit your kitchen layout.

Cooking functions guide

Siemens ovens offer a wide choice of heating methods, providing ideal cooking options for all types of food.

Top and bottom heat

Ideal for single shelf cooking and gives a crisper, drier result and is ideal for meat and fruit pies. The oven needs to be pre-heated on this setting.

hydroBaking

The moisture produced by the food during cooking will remain inside the oven, giving more moist results. This setting improves the texture and keeping qualities of cakes, breads and pastry items. The oven needs to be pre-heated on this setting.

3D hot air Plus

Ideal for all types of foods, cooking on up to three levels at the same time. Great for baking and roasting, ideal for larger joints.

Pizza setting

This setting offers you the ideal heating method for pizzas, quiches and tarts including frozen food without pre-heating, e.g. chips and strudel.

Bottom heat

Ideal for casseroles, curries and any slow cooking. Good for bain-marie cooking, e.g. crème caramels.

Intensive heat

This type of heat uses the heating elements from the top of the oven with the addition of a more powerful bottom heating element. Ideal for cheesecakes, crispy cake bases and baking tins that have poor heat conduction.

Keep warm function

On this setting, food can be kept warm in the oven until required, without spoiling or drying out.

Low temperature cooking

This function allows you to cook at low temperatures to produce moist and tender results. Ideal for good quality meat that is pan fried to seal in the juices and then transferred to an oven proof dish with a lid. The low temperature in the oven creates the perfect cooking environment and reduces the risk of overcooking.

Hot air grilling

This cooking system is ideally suited for poultry and duck up to 2.5 kg/5 lb and for smaller cuts of meat. Also ideal for crisping the crackling on pork (use this for the last 30 minutes of the cooking time for the perfect crispy finish).

cookControl

This offers you up to 68 different programs for fresh and frozen foods. Simply enter the appropriate cooking program, then the weight of the food and the oven automatically selects the best setting. It then controls the exact cooking time and switches off when the meal is done, using the residual heat to save energy.

Radiant grilling on small surface

Because you only use the centre of the grill, this is perfect for cooking smaller quantities.

Plate warming function

As food stays warm for longer on pre-heated plates, you can pre-heat plates and serving dishes by selecting this function.

Radiant grilling on large surface

Three-stage variable grill gives you precision grill temperature control for a full width grill.

Speed cooking

This function combines upper heating elements, a ring element and a fan, together with a heated ceramic base. No pre-heating is required. Frozen food can be cooked up to 30% quicker than by conventional methods. Particularly good for bread or convenience foods such as pizza.

Available on liftMatic only.

Defrosting

Gently defrost a delicate gateaux or a large joint of meat or turkey. This setting circulates room temperature air around the food.

Note

Please check product specifications for individual cooking functions.

HB78AU570A 60 cm Built-in Pyrolytic Oven Stainless Steel	
Oven type and heating methods	▪ Universal PLUS oven with 13 heating methods: – Top and bottom heat – 3D hot air Plus – Bottom heat – Keep warm function – hydroBaking – Pizza setting – Intensive heat – Low temperature cooking – Hot air grilling – Radiant grilling on small surface – Radiant grilling on large surface – Defrosting – Plate warming function ▪ Large capacity with 63 litres volume ▪ 5 shelf levels
Comfort	▪ **cookControl68** with 68 automatic programs ▪ lightControl ▪ Electronic clock/timer with LED display and actual temperature display ▪ LED function display with recommended temperature settings ▪ Text display with 30 different languages ▪ Sabbath mode ▪ Memory function ▪ Telescopic pan set 3-fold, fully extendable ▪ Precise oven control from 30°C to 300°C ▪ **softLight** halogen cavity illumination ▪ Two-fold cavity illumination ▪ Door contact illumination
Cleaning	▪ **activeClean®** – automatic self-cleaning function with automatic safety door lock ▪ Full glass inner door ▪ Grey enamel oven interior ▪ Smooth inner side walls ▪ activeClean® compatible accessories
Speed	▪ Automatic rapid heating
Design	▪ Light concept white/blue ▪ Retractable and illuminated metal-coated control dial ▪ Metal handle bar
Environment and Safety	▪ Quadrupled glazed coolTouch door ▪ Heat reflective glass ▪ Child lock for settings and door (optional) ▪ Active odour catalyser ▪ Residual heat indicator ▪ Oven cavity illumination On/Off function ▪ Suspended operation by open door switch ▪ Automatic safety switch-off function ▪ Integrated cooling fan
Supplied Accessories	▪ 2 enamel baking trays – activeClean® compatible ▪ 1 universal pan – activeClean® compatible ▪ 1 wire grid ▪ 1 split grill tray – activeClean® compatible
Dimensions (HxWxD)	▪ Appliance: 595 x 595 x 548 mm ▪ Cut-out: 575-597 x 560 x 550 mm ▪ Cavity: 323 x 420 x 423 mm
Technical Information	▪ 63 litres cavity volume ▪ 3.65 kW total connected load ▪ 220-240 V/50-60 Hz/16 Amp ▪ 1 pc circular and 1 pc rectangular halogen oven lighting on top and side at 50 W ▪ Temperature from 30°C to 300°C

HB76LU560A 60 cm Built-in Pyrolytic Oven Stainless Steel	
Oven type and heating methods	▪ Universal PLUS oven with 10 heating methods: – Top and bottom heat – 3D hot air Plus – Bottom heat – Warming – hydroBaking – Pizza setting – Hot air grilling – Radiant grilling on small surface – Radiant grilling on large surface – Defrosting ▪ Large capacity with 63 litres volume ▪ 5 shelf levels
Comfort	▪ **Side opening door – left side hinged** ▪ **cookControl40** with 40 automatic programs ▪ lightControl ▪ Electronic clock/timer with LED display and actual temperature display ▪ LED function display with recommended temperature settings ▪ Sabbath mode ▪ Memory function ▪ Telescopic pan set 3-fold, fully extendable ▪ Precise oven control from 30°C to 300°C ▪ Two-fold cavity illumination ▪ Door contact illumination
Cleaning	▪ **activeClean®** – automatic self-cleaning function with automatic safety door lock ▪ Full glass inner door ▪ Grey enamel oven interior ▪ Smooth inner side walls ▪ activeClean® compatible accessories
Speed	▪ Automatic rapid heating
Design	▪ Light concept white/blue ▪ Retractable and illuminated metal-coated control dial ▪ Metal handle bar
Environment and Safety	▪ Quadrupled glazed coolTouch door ▪ Heat reflective glass ▪ Child lock for settings and door (optional) ▪ Active odour catalyser ▪ Residual heat indicator ▪ Oven cavity illumination On/Off function ▪ Suspended operation by open door switch ▪ Automatic safety switch-off function ▪ Integrated cooling fan
Supplied Accessories	▪ 2 enamel baking trays – activeClean® compatible ▪ 1 universal pan – activeClean® compatible ▪ 1 wire grid ▪ 1 split grill tray – activeClean® compatible
Dimensions (HxWxD)	▪ Appliance: 595 x 595 x 548 mm ▪ Cut-out: 575-597 x 560 x 550 mm ▪ Cavity: 323 x 420 x 423 mm
Technical Information	▪ 63 litres cavity volume ▪ 3.65 kW total connected load ▪ 220-240 V/50-60 Hz/16 Amp ▪ 1 pc circular and 1 pc rectangular halogen oven lighting on top and side at 50 W ▪ Temperature from 30°C to 300°C

HB76RU560A 60 cm Built-in Pyrolytic Oven Stainless Steel	
Oven type and heating methods	▪ Universal PLUS oven with 10 heating methods: – Top and bottom heat – 3D hot air Plus – Bottom heat – Warming – hydroBaking – Pizza setting – Hot air grilling – Radiant grilling on small surface – Radiant grilling on large surface – Defrosting ▪ Large capacity with 63 litres volume ▪ 5 shelf levels
Comfort	▪ **Side opening door – right side hinged** ▪ **cookControl40** with 40 automatic programs ▪ lightControl ▪ Electronic clock/timer with LED display and actual temperature display ▪ LED function display with recommended temperature settings ▪ Sabbath mode ▪ Memory function ▪ Telescopic pan set 3-fold, fully extendable ▪ Precise oven control from 30°C to 300°C ▪ Two-fold cavity illumination ▪ Door contact illumination
Cleaning	▪ **activeClean®** – automatic self-cleaning function with automatic safety door lock ▪ Full glass inner door ▪ Grey enamel oven interior ▪ Smooth inner side walls ▪ activeClean® compatible accessories
Speed	▪ Automatic rapid heating
Design	▪ Light concept white/blue ▪ Retractable and illuminated metal-coated control dial ▪ Metal handle bar
Environment and Safety	▪ Quadrupled glazed coolTouch door ▪ Heat reflective glass ▪ Child lock for settings and door (optional) ▪ Active odour catalyser ▪ Residual heat indicator ▪ Oven cavity illumination On/Off function ▪ Suspended operation by open door switch ▪ Automatic safety switch-off function ▪ Integrated cooling fan
Supplied Accessories	▪ 2 enamel baking trays – activeClean® compatible ▪ 1 universal pan – activeClean® compatible ▪ 1 wire grid ▪ 1 split grill tray – activeClean® compatible
Dimensions (HxWxD)	▪ Appliance: 595 x 595 x 548 mm ▪ Cut-out: 575-597 x 560 x 550 mm ▪ Cavity: 323 x 420 x 423 mm
Technical Information	▪ 63 litres cavity volume ▪ 3.65 kW total connected load ▪ 220-240 V/50-60 Hz/16 Amp ▪ 1 pc circular and 1 pc rectangular halogen oven lighting on top and side at 50 W ▪ Temperature from 30°C to 300°C

HB76AU560A 60 cm Built-in Pyrolytic Oven Stainless Steel	
Oven type and heating methods	▪ Universal PLUS oven with 10 heating methods: – Top and bottom heat – 3D hot air Plus – Bottom heat – Warming – hydroBaking – Pizza setting – Hot air grilling – Radiant grilling on small surface – Radiant grilling on large surface – Defrosting ▪ Large capacity with 63 litres volume ▪ 5 shelf levels
Comfort	▪ **cookControl40** with 40 automatic programs ▪ lightControl ▪ Electronic clock/timer with LED display and actual temperature display ▪ LED function display with recommended temperature settings ▪ Sabbath mode ▪ Memory function ▪ Telescopic pan set 3-fold, fully extendable ▪ Precise oven control from 30°C to 300°C ▪ Two-fold cavity illumination ▪ Door contact illumination
Cleaning	▪ **activeClean®** – automatic self-cleaning function with automatic safety door lock ▪ Full glass inner door ▪ Grey enamel oven interior ▪ Smooth inner side walls ▪ activeClean® compatible accessories
Speed	▪ Automatic rapid heating
Design	▪ Light concept white/blue ▪ Retractable and illuminated metal-coated control dial ▪ Metal handle bar
Environment and Safety	▪ Quadrupled glazed coolTouch door ▪ Heat reflective glass ▪ Child lock for settings and door (optional) ▪ Active odour catalyser ▪ Residual heat indicator ▪ Oven cavity illumination On/Off function ▪ Suspended operation by open door switch ▪ Automatic safety switch-off function ▪ Integrated cooling fan
Supplied Accessories	▪ 2 enamel baking trays – activeClean® compatible ▪ 1 universal pan – activeClean® compatible ▪ 1 wire grid ▪ 1 split grill tray – activeClean® compatible
Dimensions (HxWxD)	▪ Appliance: 595 x 595 x 548 mm ▪ Cut-out: 575-597 x 560 x 550 mm ▪ Cavity: 323 x 420 x 423 mm
Technical Information	▪ 63 litres cavity volume ▪ 3.65 kW total connected load ▪ 220-240 V/50-60 Hz/16 Amp ▪ 1 pc circular and 1 pc rectangular halogen oven lighting on top and side at 50 W ▪ Temperature from 30°C to 300°C

Ovens

HB58AU560A 60 cm Built-in Oven Stainless Steel	
Oven type and heating methods	▪ Universal PLUS oven with 13 heating methods: – Top and bottom heat – 3D hot air Plus – Bottom heat – Keep warm function – hydroBaking – Pizza setting – Intensive heat – Low temperature cooking – Hot air grilling – Radiant grilling on small surface – Radiant grilling on large surface – Defrosting – Plate warming function ▪ Large capacity with 63 litres volume ▪ 5 shelf levels
Comfort	▪ **cookControl68** with 68 automatic programs ▪ lightControl ▪ Electronic clock/timer with LED display and actual temperature display ▪ LED function display with recommended temperature settings ▪ Text display with 30 different languages to choose from ▪ Sabbath mode ▪ Memory function ▪ Telescopic pan set 3-fold, fully extendable ▪ Precise oven control from 30°C to 300°C ▪ **softLight** halogen cavity illumination ▪ Two-fold cavity illumination ▪ Door contact illumination
Cleaning	▪ ecoClean® self-cleaning function (rear, sides and ceiling) ▪ Full glass inner door ▪ Grey enamel oven interior ▪ Smooth inner side walls
Speed	▪ Automatic rapid heating
Design	▪ Light concept white/blue ▪ Retractable and illuminated metal-coated control dial ▪ Metal handle bar
Environment and Safety	▪ Quadrupled glazed coolTouch door ▪ Heat reflective glass ▪ Child lock for settings ▪ Active odour catalyser ▪ Residual heat indicator ▪ Oven cavity illumination On/Off function ▪ Suspended operation by open door switch ▪ Automatic safety switch-off function ▪ Integrated cooling fan
Supplied Accessories	▪ 2 enamel baking trays ▪ 1 universal pan ▪ 1 wire grid ▪ 1 split grill tray
Dimensions (HxWxD)	▪ Appliance: 595 x 595 x 548 mm ▪ Cut-out: 575-597 x 560 x 550 mm ▪ Cavity: 323 x 420 x 423 mm
Technical Information	▪ 63 litres cavity volume ▪ 3.65 kW total connected load ▪ 220-240 V/50-60 Hz/16 Amp ▪ 1 pc circular halogen and 1 pc rectangular halogen oven lighting on top and side at 50 W ▪ Temperature from 30°C to 300°C

HB56AU550A 60 cm Built-in Oven Stainless Steel	
Oven type and heating methods	▪ Universal PLUS oven with 10 heating methods: – Top and bottom heat – 3D hot air Plus – Bottom heat – Warming – hydroBaking – Pizza setting – Hot air grilling – Radiant grilling on small surface – Radiant grilling on large surface – Defrosting ▪ Large capacity with 63 litres volume ▪ 5 shelf levels
Comfort	▪ **cookControl40** with 40 automatic programs ▪ lightControl ▪ Electronic clock/timer with LED display and actual temperature display ▪ LED function display with recommended temperature settings ▪ Sabbath mode ▪ Memory function ▪ Telescopic pan set 3-fold, fully extendable ▪ Precise oven control from 30°C to 300°C ▪ Two-fold cavity illumination ▪ Door contact illumination
Cleaning	▪ ecoClean® self-cleaning function (rear, sides and ceiling) ▪ Full glass inner door ▪ Grey enamel oven interior ▪ Smooth inner side walls
Speed	▪ Automatic rapid heating
Design	▪ Light concept white/blue ▪ Retractable and illuminated metal-coated control dial ▪ Metal handle bar
Environment and Safety	▪ Quadrupled glazed coolTouch door ▪ Heat reflective glass ▪ Child lock for settings ▪ Active odour catalyser ▪ Residual heat indicator ▪ Oven cavity illumination On/Off function ▪ Suspended operation by open door switch ▪ Automatic safety switch-off function ▪ Integrated cooling fan
Supplied Accessories	▪ 2 enamel baking trays ▪ 1 universal pan ▪ 1 wire grid ▪ 1 split grill tray
Dimensions (HxWxD)	▪ Appliance: 595 x 595 x 548 mm ▪ Cut-out: 575-597 x 560 x 550 mm ▪ Cavity: 323 x 420 x 423 mm
Technical Information	▪ 63 litres cavity volume ▪ 3.65 kW total connected load ▪ 220-240 V/50-60 Hz/16 Amp ▪ 1 pc circular and 1 pc rectangular oven lighting on top and side at 65 W ▪ Temperature from 30°C to 300°C

HB43AU550A 60 cm Built-in Oven Stainless Steel	
Oven type and heating methods	▪ Universal oven with 5 heating methods: – Top and bottom heat – 3D hot air Plus – Bottom heat – Hot air grilling – Radiant grilling on large surface ▪ Large capacity with 63 litres volume ▪ 5 shelf levels
Comfort	▪ Electronic clock/timer with LED display ▪ Oven cavity illumination ▪ Telescopic pan set 3-fold, fully extendable
Cleaning	▪ ecoClean® self-cleaning function (rear, sides and ceiling) ▪ Full glass inner door ▪ Grey enamel oven interior ▪ Smooth inner side walls
Speed	▪ Automatic rapid heating
Design	▪ Light concept white/blue ▪ Retractable control dials ▪ Metal handle bar
Environment and Safety	▪ Quadrupled glazed coolTouch door ▪ Heat reflective glass ▪ Child lock for settings ▪ Integrated cooling fan
Supplied Accessories	▪ 2 enamel baking trays ▪ 1 universal pan ▪ 1 wire grid ▪ 1 split grill tray
Dimensions (HxWxD)	▪ Appliance: 595 x 595 x 548 mm ▪ Cut-out: 575-597 x 560 x 550 mm ▪ Cavity: 323 x 420 x 423 mm
Technical Information	▪ 63 litres cavity volume ▪ 3.5 kW total connected load ▪ 220-240 V/50-60 Hz/16 Amp ▪ 1 pc circular oven lighting on top at 40 W ▪ Temperature from 50°C to 270°C

HB76P570E 60 cm Built-in liftMatic Oven Stainless Steel	
Oven type and heating methods	▪ Universal PLUS oven with 11 heating methods: – Top and bottom heat – 3D hot air – Bottom heat – Keep warm setting (closed) – Keep warm setting (open) – Speed cooking – hydroBaking – Hot air grilling – Radiant grilling – Defrosting – Pre-heating ▪ Large capacity with 50 litres volume ▪ 4 shelf levels
Comfort	▪ **liftMatic** lift system with electric motor ▪ 26 Automatic programs ▪ Electronic clock/timer with LED display and actual temperature display ▪ LED function display with recommended temperature settings ▪ Precise oven control from 30°C to 300°C ▪ Three-fold cavity illumination ▪ Independent oven interior light button ▪ Door contact illumination
Cleaning	▪ **activeClean®** – automatic self-cleaning function with liftMatic safety lock ▪ Full glass inner door ▪ Ceramic glass platform base ▪ Grey enamel oven interior ▪ Smooth inner side walls
Speed	▪ Automatic rapid heating
Design	▪ Retractable control dials
Environment and Safety	▪ Quadrupled glazed coolTouch door ▪ Heat reflective glass ▪ Child lock for settings ▪ Active odour catalyser ▪ Residual heat indicator ▪ Oven cavity illumination On/Off function ▪ Suspended operation when opened ▪ Automatic safety switch-off function ▪ Integrated cooling fan
Supplied Accessories	▪ 1 enamel baking trays – activeClean® compatible ▪ 1 universal pan – activeClean® compatible ▪ 1 wire grid
Dimensions (HxWxD)	▪ Appliance: 538 x 595 x 455 mm ▪ Cavity: 313 x 468 x 344 mm
Technical Information	▪ 50 litres cavity volume ▪ 3.6 kW total connected load ▪ 220-240 V/50-60 Hz/16 Amp ▪ 1 pc circular and 2 pc rectangular halogen oven lighting on top and sides at 60 W ▪ Temperature from 30°C to 300°C

Ovens accessories

Part No.	Description	For models
HZ324000 	Wire rack to fit inside universal pan	HB43AU550A HB56AU550A HB58AU560A HB76AU560A HB76LU560A HB76RU560A HB78AU570A
HZ325000	Split grill tray	HB43AU550A HB56AU550A HB58AU560A
HZ327000	Pizza baking stone – including wooden bread paddle	HB43AU550A HB56AU550A HB58AU560A HB76AU560A HB76LU560A HB76RU560A HB78AU570A
HZ331000	Enamelled baking tray	HB43AU550A HB56AU550A HB58AU560A
HZ331010	Enamelled baking tray – non-stick coating	HB43AU550A HB56AU550A HB58AU560A
HZ332000	Enamelled universal pan	HB43AU550A HB56AU550A HB58AU560A
HZ332010	Enamelled universal pan – non-stick coating	HB43AU550A HB56AU550A HB58AU560A

Part No.	Description	For models
HZ333000	Enamelled Profi pan – extra deep	HB43AU550A HB56AU550A HB58AU560A
HZ333001	Enamelled Profi pan lid	HB43AU550A HB56AU550A HB58AU560A HB76AU560A HB76LU560A HB76RU560A HB78AU570A
HZ334000 	Wire rack	HB43AU550A HB56AU550A HB58AU560A HB76AU560A HB76LU560A HB76RU560A HB78AU570A
HZ325070	Split grill tray – activeClean® proof	HB76AU560A HB76LU560A HB76RU560A HB78AU570A
HZ331070	Enamelled baking tray – activeClean® proof	HB76AU560A HB76LU560A HB76RU560A HB78AU570A
HZ332070	Enamelled universal pan – activeClean® proof	HB76AU560A HB76LU560A HB76RU560A HB78AU570A
HZ333070	Enamelled Profi pan – extra deep – activeClean® proof	HB76AU560A HB76LU560A HB76RU560A HB78AU570A

Perfect together – whether stacked or side-by-side

A steam oven on top? A combination oven on the side? A fully-automatic espresso machine next to them? Whichever Siemens compact45 appliance you choose, your dream kitchen will have a coordinated appearance. That's because the contemporary, timeless appliance design creates a visual sense of order and clarity. And thanks to the intuitive lightControl concept, you'll feel right at home when using any of the Siemens built-in appliances.

Perfect coordination

All Siemens compact45 appliances in the range coordinate with each other perfectly. Whether you are aiming for clean, vertical lines or are positioning two or three models side-by-side, everything lines up perfectly.

lightControl

Featuring the same electronic control concept as the single ovens, the Siemens range of compact appliances are perfectly coordinated when installed in a tower configuration. The interactive clearText display guides you easily through the available settings and when not in use, the central control dial can be retracted so it is flush with the rest of the fascia.

Higher. Faster. Wider. The compact, built-in microwave

With the new, built-in microwave oven, we have given the attractive design of our microwaves a place among the compact appliances. Plus, we've made room for your culinary art. Even large platters and bowls fit easily into its generous interior. The simple, clear arrangement of the control elements makes using our microwave particularly logical and intuitive. The design offers the best possible fit with the new range of compact appliances in the series. At a height of 45 cm, it's perfectly suited for installation in a tall cupboard or in a side-by-side configuration.

Multi-function cooking

Siemens Siemens offers four compact45 multi-function ovens in the range:

- a built-in microwave
- two combination ovens with integrated microwave (one featuring activeClean®)
- combination steamer with integrated oven function

The combination ovens with microwave offer up to 13 functions as well as cookControl70, Siemens' pre-set automatic cooking programs. Plus, use one of the memory positions to store your favourite recipes to ensure it is cooked to perfection every time.

Multi-function oven with microwave

The Siemens compact45 HB86K572B is primarily a multi-function oven, but offers the option of a microwave function, which can be used independently or in combination with many of the standard cooking functions. Perfect for those occasions when traditional results are needed, but in a fraction of the time. And that's not all – choose from one of the 70 automatic defrost, cooking and combination programs for perfect results every time.

Multi-function oven with activeClean® and microwave

An ideal solution in a tower configuration, you can combine a compact45 oven with activeClean® and microwave (HB86P572B) with an activeClean® 60 cm single oven. This configuration not only delivers complete cooking flexibility, it also provides a massive 98 litres capacity. And because both ovens feature activeClean®, you'll never have to manually clean again.

Stylish built-in microwaves not only look good, they free up valuable worktop space

Automatic cooking programs and recipe memory setting

Each model in the Siemens microwave and microwave combination oven range features weight automatic cooking and defrost programs – simply enter the food type and weight and let the appliance do the rest. Most models offer at least one memory position so you can store your favourite recipes.

Three-stage programming

Siemens microwaves allow you to program the appliance to run up to three consecutive power levels and cooking times for the ultimate in convenient cooking.

The warming drawer with a push/pull function

A gentle touch of the warming drawer fascia is enough to release the drawer that effortlessly glides to fully extend. The elegant design requires no handle, making the warming drawer integrate perfectly into any kitchen. Naturally, it keeps your food at the ideal temperature – from 30°C to 80°C – and is appropriate for professionally pre-warming your dishes.

Easy access

The fully extendable pull-out drawer allows easy access to the contents and can accommodate up to 25 kg (15 kg for the accessory drawer).

Please check individual specifications for this feature.

Cleaning made simple

The warming drawer features a recessed ceramic glass base that is smooth and hard-wearing. Its durability allows you to easily clean the interior when required.

More than just drawers

The on/off light indicator lets you check whether the warming drawer has been turned off. Depending on the size of the drawer, they can preheat up to either six or 12 place settings and can also be used to keep food hot, prove dough, gently thaw delicate items and warm up bread. And, depending on your requirements, the temperature can be adjusted from 30°C-80°C.

Elegance and practicality combined – the accessory drawer

The stainless steel accessory drawer – a new addition to the Siemens range – is just as practical as it is visually appealing. You can position warming drawers or accessory drawers under products that have been installed side-by-side. The format and design of the accessory drawer matches the premium appearance of the warming drawer, giving you a uniform result. In addition to its seamless beauty, this design also provides valuable storage space for your cooking utensils.

Make the choice for good taste

Whether it's gentle steam cooking, classic baking and roasting with hot air – or even both at the same time – the Siemens combination steam oven provides the ideal cooking methods for all food types.

Combination of steam and hot air cooking

Pure steam cooking has its benefits but it may not be the ideal option for foods that need browning and crisping. This is where the steam combination oven comes into its own. Combining traditional hot air cooking with steam cooking delivers moist, tender and browned meats and well-risen, crusty bread. Moist and tender roast pork with crispy crackling is perfectly cooked using the combination function.

Hot air cooking

The oven function offers a temperature range of 30-230°C, which is ideal for traditional baking and roasting. The size of the oven is also practical when a smaller capacity is required.

Reheating

Reheating leftovers or food for latecomers using steam ensures the food is refreshed, moist and retains its texture.

Cleaning and de-scaling

Siemens steam combination ovens feature durable, high-quality stainless steel interiors and catering quality stainless accessories for easy cleaning. These models offer a dedicated de-scaling program as well as a separate cleaning program on-demand.

How does it work?

Siemens steam combination ovens are quick and easy to use – the removable water tank has sufficient capacity to provide up to 70 minutes steam cooking at full power and means the appliance does not need plumbing. Water is fed into the oven cavity and heated by a powerful element in the base of the appliance. This ensures maximum efficiency, as the appliance is only heating the amount of water needed for the cooking process. The ovens are thermostatically controlled to allow steam temperatures of 35-100°C – ideal for all types of fish, meat, poultry and vegetables.

Benefits of cooking using steam

Combination steam cooking/baking is used extensively in commercial catering as it delivers moist and tender results. But that's not all. Steam cooking is gentler than traditional cooking methods, which not only deliver food that is tender and full of texture, but also ensures taste and colour is retained. Less of the vital vitamins, minerals and nutrients are lost with steam cooking and as the healthier option, there is also no need to add salt or oil.

cookControl with Siemens automatic programs

Choose any one of the 70 specially tested automatic cooking programs for perfect results every time. Simply select the food type, enter the weight and press the start button.

This sophisticated fully automatic compact45 built-in coffee centre makes hot drinks with flair

Flavour with flair

Astonishingly, there are 800 sub-flavours in a cup of espresso, and for it to achieve perfection they must be allowed to fully unfold. For this to happen, the water must be sustained at the ideal temperature during the brewing process. With our new sensoFlow System, this is now possible, giving you perfect flavour every time. And with minimal heat up time and minimum standby power, it's also a unique, energy-saving feature.

Crema with flair

A golden-brown, creamy and long-lasting crema is the trademark of a good espresso. To achieve this, a constant pressure is key in extracting the maximum flavour from the beans. Preparing espresso requires the talents and instinct of a first-class barista. With the coffee centre, we have built those skills into the very fabric of the machine. The 'aroma pressure system' automatically achieves the ideal, continuous pressure and therefore, the perfect brewing result for every cup. The convex shaped tamper has been designed to release more flavour from ground coffee, so you'll always end up with the perfect crema. Automatically.

Simplicity with flair

A fine, milky foam and a froth as smooth as whipped cream. That's the basis of the ultimate cappuccino. The ingenious swivel arm is simple to use and an optimised swirling process inside the milk nozzle produces the ultimate milk foam for perfect results. We also brought a lot of in-depth thinking to the subject of milk. The result offers new product ergonomics and a milk system separate from the coffee chamber.

Design with flair

Espresso connoisseurs who are enthralled by the entire espresso-making process will love the transparency and intuitive operation of our coffee centre. As well as drawing attention to the bean container and the water tank, an innovative lighting concept highlights the individual stages of the entire process.

reddot design award winner 2009

reddot design award winner 2009

HB36D572B 60 cm Built-in Combi-Steam Oven Stainless Steel	
Oven type and heating methods	▪ Steamer with integrated convection oven ▪ Steaming from 35°C to 100°C ▪ Hot air from 30°C to 230°C ▪ Combination steam and hot air from 120°C to 230°C ▪ Reheat ▪ Prove ▪ Defrost ▪ Slow cooking ▪ Pre-heating ▪ Keep warm ▪ Large capacity with 32 litres volume ▪ 4 shelf levels
Comfort	▪ **cookControl70** with 70 automatic programs ▪ lightControl ▪ Electronic clock/timer with LED display and actual temperature display ▪ LED function display with recommended temperature settings ▪ Text display with 30 different languages to choose from ▪ Memory function ▪ Large 1.3 litre water tank ▪ Water tank empty/half full indicator ▪ Precise oven control from 30°C to 230°C ▪ Halogen cavity illumination ▪ Door contact illumination
Cleaning	▪ Cleaning aid program ▪ Automatic descaling program ▪ Stainless steel cavity ▪ Smooth inner side walls
Speed	
Design	▪ Light concept white/blue ▪ Retractable and illuminated metal-coated control dial ▪ Metal handle bar
Environment and Safety	▪ Double glazed door ▪ Child lock for settings ▪ Suspended operation by open door switch ▪ Automatic safety switch-off function ▪ Integrated cooling fan
Supplied Accessories	▪ 1 wire grid ▪ 1 perforated stainless steel cooking tray large (40mm depth) ▪ 1 perforated stainless steel cooking tray small (40mm depth) ▪ 1 non-perforated stainless steel cooking tray large (28mm depth) ▪ 1 non-perforated stainless steel cooking tray small (40mm depth)
Dimensions (HxWxD)	▪ Appliance: 454 x 595 x 520 mm ▪ Cut-out: 450 x 560 x 550 mm ▪ Cavity: 245 x 355 x 400 mm
Technical Information	▪ 32 litres cavity volume ▪ 1.9 kW total connected load ▪ 220-240 V/50-60 Hz/10 Amp ▪ 1 pc circular halogen oven lighting on side at 25 W ▪ Temperature from 30°C to 230°C ▪ Built-in Instruction: Combi-Steam Oven HB36D572B **must not** be installed below any other appliance

HB86P572B 60 cm Built-in Pyrolytic Combi-Microwave Oven Stainless Steel	
Oven type and heating methods	▪ Microwave with integrated convection oven and 13 heating methods: – Top and bottom heat – 3D hot air – Hot air – Bottom heat – Plate warming – Keep warm – Intensive heat – Low temperature cooking – Hot air grilling – Radiant grilling on small surface – Radiant grilling on large surface – Micro-combi gentle – Micro-combi intensive ▪ 1000 W microwave with Inverter technology ▪ 5 power settings: 1000/600/360/180/90 W ▪ Large capacity with 42 litres volume ▪ 3 shelf levels
Comfort	▪ **cookControl70** with 70 automatic programs ▪ lightControl ▪ Electronic clock/timer with LED display and actual temperature display ▪ LED function display with recommended temperature settings ▪ Text display with 30 different languages to choose from ▪ Sabbath mode ▪ Memory function with 6 settings ▪ Follow-up mode with 3 programmable microwave power levels/heating methods ▪ Information button ▪ Precise oven control from 30°C to 300°C ▪ Halogen cavity illumination ▪ Door contact illumination
Cleaning	▪ **activeClean®** – automatic self-cleaning function with automatic safety door lock ▪ Grey enamel oven interior
Speed	▪ Automatic rapid heating ▪ Inverter technology for less time and energy consumption ▪ Combination of microwave with 6 different heating functions
Design	▪ Light concept white/blue ▪ Retractable and illuminated metal-coated control dial ▪ Metal handle bar
Environment and Safety	▪ Double glazed door ▪ Child lock for settings ▪ Residual heat indicator ▪ Suspended operation by open door switch ▪ Automatic safety switch-off function ▪ Integrated cooling fan
Supplied Accessories	▪ 1 universal pan ▪ 1 wire grid ▪ 1 glass pan
Dimensions (HxWxD)	▪ Appliance: 454 x 595 x 531 mm ▪ Cut-out: 450 x 560 x 550 mm ▪ Cavity: 221 x 424 x 363 mm
Technical Information	▪ 42 litres cavity volume ▪ 3.6 kW total connected load ▪ 220-240 V/50-60 Hz/15 Amp ▪ 1 pc rectangular halogen oven lighting on side at 20 W ▪ Temperature from 30°C to 300°C

HB86K572B 60 cm Built-in Combi-Microwave Oven Stainless Steel	
Oven type and heating methods	▪ Microwave with integrated convection oven and 13 heating methods: Top and bottom heat – 3D hot air – Hot air – Bottom heat – Plate warming – Keep warm – Intensive heat – Low temperature cooking – Hot air grilling – Radiant grilling on small surface – Radiant grilling on large surface – Micro-combi gentle – Micro-combi intensive ▪ 1000 W microwave with Inverter technology ▪ 5 power settings: 1000/600/360/180/90 W ▪ Large capacity with 42 litres volume ▪ 3 shelf levels
Comfort	▪ **cookControl70** with 70 automatic programs ▪ lightControl ▪ Electronic clock/timer with LED display and actual temperature display ▪ LED function display with recommended temperature settings ▪ Text display with 30 different languages to choose from ▪ Sabbath mode ▪ Memory function with 6 settings ▪ Follow-up mode with 3 programmable microwave power levels/heating methods ▪ Information button ▪ Precise oven control from 30°C to 300°C ▪ Halogen cavity illumination ▪ Door contact illumination
Cleaning	▪ ecoClean® self-cleaning function (rear and ceiling) ▪ Grey enamel oven interior
Speed	▪ Automatic rapid heating ▪ Inverter technology for less time and energy consumption ▪ Combination of microwave with 6 different heating functions
Design	▪ Light concept white/blue ▪ Retractable and illuminated metal-coated control dial ▪ Metal handle bar
Environment and Safety	▪ Double glazed door ▪ Child lock for settings ▪ Residual heat indicator ▪ Suspended operation by open door switch ▪ Automatic safety switch-off function ▪ Integrated cooling fan
Supplied Accessories	▪ 1 universal pan ▪ 1 wire grid ▪ 1 glass pan
Dimensions (HxWxD)	▪ Appliance: 454 x 595 x 531 mm ▪ Cut-out: 450 x 560 x 550 mm ▪ Cavity: 221 x 424 x 363 mm
Technical Information	▪ 42 litres cavity volume ▪ 2.65 kW total connected load ▪ 220-240 V/50-60 Hz/15 Amp ▪ 1 pc rectangular halogen oven lighting on side at 20 W ▪ Temperature from 30°C to 300°C

HF35M562B 60 cm Built-in Microwave Oven Stainless Steel	
Oven type and heating methods	▪ Frameless built-in microwave (no trim kit required) ▪ 1000 W microwave with Inverter technology ▪ 5 power settings: 1000/600/360/180/90 W ▪ Large capacity with 36 litres cavity volume ▪ 4 shelf levels
Comfort	▪ **cookControl9** with 9 automatic programs ▪ lightControl ▪ Electronic clock/timer with LED display ▪ Memory function with 2 settings ▪ Automatic defrost programs ▪ Follow-up mode with 3 programmable microwave power levels ▪ Halogen cavity illumination ▪ Door contact illumination
Cleaning	▪ Stainless steel cavity
Speed	▪ Inverter technology for less time and energy consumption
Design	▪ Light concept white/blue ▪ Retractable control dial ▪ Metal handle bar
Environment and Safety	▪ Suspended operation by open door switch ▪ Integrated cooling fan
Supplied Accessories	▪ 1 wire grid
Dimensions (HxWxD)	▪ Appliance: 454 x 595 x 563 mm ▪ Cut-out: 450 x 560 x 550 mm ▪ Cavity: 242 x 430 x 345 mm
Technical Information	▪ 36 litres cavity volume ▪ 1.22 kW total connected load ▪ 220-240 V/50-60 Hz/10 Amp ▪ 1 pc rectangular halogen oven lighting on side at 25 W

HF25M5L2B 60 cm Built-in Microwave Oven Stainless Steel	
Oven type and heating methods	▪ Frameless built-in microwave (no trim kit required) ▪ 900 W microwave with Inverter technology ▪ 5 power settings: 900/600/360/180/90 W
Comfort	▪ **Side opening door – left side hinged** ▪ **cookControl7** with 7 automatic programs ▪ lightControl ▪ Electronic clock/timer with LED display ▪ Memory function with 2 settings ▪ Automatic defrost programs ▪ Follow-up mode with 3 programmable microwave power levels ▪ Door open switch ▪ Door contact illumination
Cleaning	▪ Stainless steel cavity
Speed	▪ Inverter technology for less time and energy consumption
Design	▪ Light concept white/blue ▪ Retractable control dial
Environment and Safety	▪ Suspended operation by open door switch ▪ Integrated cooling fan
Supplied Accessories	▪ 1 wire rack
Dimensions (HxWxD)	▪ Appliance: 382 x 595 x 320 mm ▪ Cut-out: 362-365 x 560 x 300 mm ▪ Cavity: 220 x 350 x 270 mm
Technical Information	▪ 21 litres cavity volume ▪ 1.22 kW total connected load ▪ 220-240 V/50-60 Hz/10 Amp ▪ 1 pc rectangular oven lighting on side

Part No.	Description	For models
HZ36DB 	Combi-Steam oven roasting tray set	HB36D572B
HZ86B000 	Enamelled baking tray	HB86K572B HB86P572B
HZ86G000 	Glass pan	HB86K572B HB86P572B
HZ86U000 	Enamelled universal pan	HB86K572B HB86P572B
HZ86X600	Cabinetry cover panel when HB36D572B, HF35M562B, HB86K572B or HB86P572B is installed above a 60 cm built-in oven	HB36D572B HF35M562B HB86K572B HB86P572B

Coffee machine

reddot design award winner 2009

TK76K572
Fully Automatic Built-in Coffee Machine Stainless Steel

Type and comfort	▪ aromaPressure brewing system ▪ High-value ceramic grinding unit silentCeram drive ▪ Milk nozzle with suction function 'cream centre' ▪ 'One touch' function for: latte macchiato and cappuccino, milk coffee and personalised 'My Coffee' function ▪ Pre-brewing function ▪ Intelligent 'auto valve system' switches automatically between steam and hot water function ▪ Individually adjustable temperatures for coffee (3 levels) and hot water (4 levels), individually adjustable grinding degree (4 levels) ▪ Display of remaining cups before cleaning or descaling ▪ Bean container or water tank empty indicator ▪ Early warning when bean container or water tank are close to empty
Cleaning	▪ Quick rinsing of milk system 'cream centre cleaner' ▪ Fully automatic descaling and cleaning program (combined program 'calc'n'clean') ▪ Automatically rinses when switched on or off ▪ Single-portion cleaning ▪ All milk nozzle parts are removable, separable, easy to clean and dishwasher-proof
Speed	▪ Reduced heating-up time: fastest first cup ▪ Innovative sensoFlow heating system
Design	▪ Light concept white/blue ▪ lightControl ▪ High-quality LCD display including programmable languages ▪ Front height 450.5 mm ▪ Height-adjustable coffee outlet and milk nozzle (max. 150 mm) for large 'latte macchiato' glasses ▪ Illuminated coffee outlet ▪ Removable 2.5 litre water tank ▪ Bean container with aroma preservation lid for up to 1000g ▪ Separate container for pre-grounded coffee ▪ Water and milk are handled separately within milk nozzle ▪ Removable drip dish including container for coffee grounds ▪ Removable brewing unit ▪ Coffee machine is fully retractable automatically at the push of a button ▪ 19 bar pump pressure ▪ Sound absorption for noise reduction
Supplied Accessories	▪ Integrated accessories storage with measuring spoon, milk tube and quick reference guide ▪ Milk container, Brita water filter, cleaning and descaling tablets, assembly screws and test strip for water hardness
Dimensions (HxWxD)	▪ Appliance: 454 x 594 x 515 mm ▪ Cut-out: 454 x 594 x 536 mm
Technical Information	▪ 1700W ▪ 0.81 kW total connected load ▪ 220-240 V/50-60 Hz/10 Amp

Warming drawers

HW290562B
60 cm Built-in Warming Drawer

Type and functions	▪ 290 mm high warming drawer ▪ Temperature control with 4 levels from approx. 30°C to 80°C ▪ Integrated air heater
Comfort	▪ Fully extendable push/push telescopic drawer ▪ Accommodates up to 120 Espresso cups or 12 place settings: – 12 x 24 cm dinner plate – 12 x 10 cm soup bowl – 1 x 19 cm serving dish – 1 x 17 cm serving dish – 2 x 32 cm meat plate
Cleaning	▪ Stainless steel cavity with toughened glass base
Speed	
Design	▪ Metal bar handle
Environment and Safety	▪ coolTouch front
Supplied Accessories	
Dimensions (HxWxD)	▪ Appliance: 290 x 594 x 544 mm ▪ Cut-out: 290 x 560 x 550 mm ▪ Cavity: 245 x 465 x 457 mm
Technical Information	▪ 52 litres cavity volume ▪ 25 kg weight capacity ▪ 0.81 kW total connected load ▪ 220-240 V/50-60 Hz/10 Amp

HW1405P2B
60 cm Built-in Warming Drawer

Type and functions	▪ 140mm high warming drawer ▪ Temperature control with 4 levels from approx. 30°C to 80°C ▪ Integrated air heater
Comfort	▪ Fully extendable push/push telescopic drawer ▪ Accommodates up to 80 Espresso cups or 6 place settings: – 6 x 24 cm dinner plate – 6 x 10 cm soup bowl – 1 x 19 cm serving dish – 1 x 17 cm serving dish – 1 x 32 cm meat plate
Cleaning	▪ Stainless steel cavity with toughened glass base
Speed	
Design	▪ Handle-free drawer
Environment and Safety	▪ coolTouch front
Supplied Accessories	
Dimensions (HxWxD)	▪ Appliance: 141 x 594 x 544 mm ▪ Cut-out: 141 x 560 x 550 mm ▪ Cavity: 95 x 465 x 457 mm
Technical Information	▪ 20 litres cavity volume ▪ 25 kg weight capacity ▪ 0.81 kW total connected load ▪ 220-240 V/50-60 Hz/10 Amp

HW1405A2
60 cm Built-in Utensil Drawer

Type and functions	▪ 140 mm high utensil drawer
Comfort	▪ Fully extendable push/push telescopic drawer
Cleaning	▪ Stainless steel cavity with anti-slip mat
Speed	
Design	▪ Handle-free drawer
Environment and Safety	
Supplied Accessories	
Dimensions (HxWxD)	▪ Appliance: 141 x 594 x 544 mm ▪ Cut-out: 141 x 560 x 550 mm ▪ Cavity: 108 x 465 x 457 mm
Technical Information	▪ 23 litres cavity volume ▪ 15 kg weight capacity

Siemens cooktops uniquely combine style and design with intelligent technology

In most kitchens, the cooktop is the hardest working appliance of all. It has to be many things; stylish, easy-to-use, offer accessible controls and above all, immediately responsive. Siemens cooktops meet all these requirements, and more. Whether your preference is for induction, ceramic or gas, each cooktop is designed to complement your Siemens oven.

Seamless design

The flush-fitting design of our 90 cm wide induction cooktop means that when installed, the cooking surface is flush with the surrounding worktop. A flush fit is only suitable for installation into surfaces such as natural stone (e.g. granite).

Facetted front edge design

With surface-level styling, the front of the ceramic cooktops feature a stunning black glass angled front edge with brushed stainless steel side trims.

wipeProtection

Cooking with passion can sometimes lead to a spill or two, that's why Siemens have developed the wipeProtection function. Simply activate the wipeProtection function to freeze settings for approximately 30 seconds. This provides enough time to clean up any accidental spills, without affecting any program settings.

Timer

Most Siemens cooktops feature a timer that can be used in two ways: as an independent timer (that sounds a signal at the end of the cooking time) or it can also be set to automatically switch off the cooking zone at the end of the cooking time.

Residual heat indicators

Most models feature a two-stage residual heat indicator for each cooking zone. The built-in LED shows 'H' when the zones are above 95°C, and 'h' if between 65-95°C. This is perfect for keeping food warm or for slowly finishing off cooking.

Variable power levels

Most models feature a variable 17-stage electronic temperature display that offers you complete control over your cooking from a low simmer to a rapid boil.

No more scorching – the fryingSensor Plus

It's nice to have some help with your frying. That's why Siemens developed the new fryingSensor, which works by automatically adjusting the frying temperatures according to the type of food. With a choice of four temperature levels and nine cooking programs, the fryingSensor ensures perfect results. Just select the desired frying program and a signal tone will let you know when the frying pan has reached the right temperature. It also offers the best possible protection for the pan's interior coating. And since the pan's temperature is continuously monitored and kept constant during the entire frying process, it spares you the trouble of making manual adjustments.

Available on selected Induction and Ceramic cooktops.

Frying Sensor

Innovative touchSlider control

A market first by Siemens, the touchSlider control works by gliding your fingertip over the control panel to select the appropriate power level. The 60, 80 and 90 cm cooktops feature one single monoSlider control while the flush-mounted 90 cm features five multiSlider controls.

touchSlider

Variety of cooking zones available

Extendable cooking zones allow the cooking area to be extended or reduced to accommodate large items (i.e. a fish kettle and larger saucepans) or smaller pans (e.g. asparagus pan).

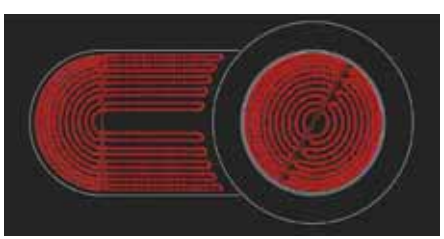

Experience the benefits of induction cooking

Induction is recognised as being one of the quickest, safest and most efficient methods of cooking. When a pan with a magnetic base is placed on the cooktop, the coil situated below the ceramic surface creates a powerful electromagnetic field, which induces a current and generates heat almost instantly directly into the pan.



Benefits of induction cooking

Induction is not only recognised as one of the fastest cooking methods, it is also considered as one of the most responsive with instant and accurate temperate control.

Unlike ceramic cooktops, where heat is created beneath the glass surface and then transferred to the cookware, induction cooktops work by creating heat directly in the pot. This means the surface of an induction cooktop does not retain the same amount of heat, making it a low-maintenance surface in the event of accidental spills. It is also designed to increase the efficiency of the cooking process.

Automatic safety switch-off

Built-in sensors enable the cooktop to switch-off in the event it is left unattended.

The XXL induction zone

Just as there's a lid for every pot, the XXL zone for induction cooktops offers the right element for every pan. The triple induction zone with a diameter of 32 cm also works perfectly for large pans, i.e. Paella and sauté pans.

Automatic pan recognition

Siemens' intelligent pan recognition feature means the cooktop will only operate if it recognises the pan is in place.

Pans suitable for induction cooktops

Only pans with a ferrous/magnetic base can be used with induction cooktops. To be certain that your cooktop performs at its best, make sure you invest in a set of good quality pans. Look for pans with a smooth, flat base – those with steel and aluminium sandwich construction are particularly good at distributing heat. Check with your pan manufacturer if you are not sure or simply apply a magnet to the base of the pan (it must be magnetic). Siemens offer a range of suitable induction cookware as optional accessories. These items have been specially selected by Siemens following intensive testing and will ensure optimum performance when used with our induction cooktops.

EH975ME11E 90 cm Induction Cooktop	
Cooktop type and Special Features	▪ **touchSlider** controls (mono) ▪ 4 induction cooking zones: – 4 standard zones
Comfort	▪ 17-stage power setting for each cooking zone ▪ LED timer and display for all cooking zones ▪ wipeProtection function ▪ Automatic time limit switch-off function
Speed	▪ powerBoost function for all cooking zones for less cooking time
Design	▪ slimLine ▪ Facette design with stainless steel side profiles and bevelled ceramic glass front ▪ Ceramic glass without decor
Environment and Safety	▪ Automatic pan recognition ▪ 2-stage (hH) digital residual heat indicator for each cooking zone ▪ Childproof lock ▪ Sound buzzer ▪ Automatic safety switch-off ▪ Power ON indicator via on/off switch
Size/Power	▪ Front left: 180 mm • 1.8 kW and 2.5 kW with powerBoost function ▪ Front right: 210 mm • 2.2 kW and 3.3 kW with powerBoost function ▪ Rear left: 180 mm • 1.8 kW and 2.5 kW with powerBoost function ▪ Rear right: 145 mm • 1.4 kW and 1.8 kW with powerBoost function
Supplied Accessories	
Dimensions (WxD)	▪ Appliance: 912 x 350 mm ▪ Cut-out: 880 x 330 mm
Technical Information	▪ 7.2 kW total connected load ▪ 220-240 V/50-60 Hz ▪ Fixed connection ▪ Installation from above

EH901SK11 90 cm Induction Cooktop	
Cooktop type and Special Features	▪ **touchSlider** controls (multi) ▪ 5 induction cooking zones: – 1 dual circuit zone – 4 standard zones
Comfort	▪ 17-stage power setting for each cooking zone ▪ LED timer and display for all cooking zones ▪ **XL cooking zone** with 28 cm diameter ▪ wipeProtection function ▪ Automatic time limit switch-off function
Speed	▪ powerBoost function for all cooking zones for less cooking time
Design	▪ **Fully integrated/flush mounted** ▪ Ceramic glass with protective decor printing
Environment and Safety	▪ Automatic pan recognition ▪ 2-stage (hH) digital residual heat indicator for each cooking zone ▪ Childproof lock ▪ Sound buzzer ▪ Automatic safety switch-off ▪ Power ON indicator via on/off switch
Size/Power	▪ Front left: 180 mm • 1.8 kW and 2.5 kW with powerBoost function ▪ Front right: 210 mm • 2.2 kW and 3.3 kW with powerBoost function ▪ Centre: 180/280 mm • 1.8/2.8 kW and 2.5/3.6 kW with powerBoost function ▪ Rear left: 180 mm • 1.8 kW and 2.5 kW with powerBoost function ▪ Rear right: 145 mm • 1.4 kW and 1.8 kW with powerBoost function
Supplied Accessories	
Dimensions (WxD)	▪ Appliance: 892 x 512 mm ▪ Cut-out: 880 x 490-500 mm
Technical Information	▪ 10.8 kW total connected load ▪ 220-240 V/50-60 Hz ▪ Fixed connection

EH975MD21E 90 cm Induction Cooktop	
Cooktop type and Special Features	▪ **touchSlider** controls (mono) ▪ **frySensor PLUS** with 4 fry temperature ranges and 9 fully automatic fry programs ▪ 5 induction cooking zones: – 1 triple circuit zone – 2 standard zones with frySensor – 2 standard zones
Comfort	▪ 17-stage power setting for each cooking zone ▪ LED timer and display for all cooking zones ▪ **XXL cooking zone** with 32 cm diameter ▪ wipeProtection function ▪ Automatic time limit switch-off function
Speed	▪ powerBoost function for all cooking zones for less cooking time
Design	▪ Facette design with stainless steel side profiles and bevelled ceramic glass front ▪ Ceramic glass without decor ▪ Can be combined with Domino cooktops
Environment and Safety	▪ Automatic pan recognition ▪ 2-stage (hH) digital residual heat indicator for each cooking zone ▪ Childproof lock ▪ Sound buzzer ▪ Automatic safety switch-off ▪ Power ON indicator via on/off switch
Size/Power	▪ Front left: **frySensor PLUS** • 180 mm • 1.8 kW and 2.5 kW with powerBoost function ▪ Front right: **frySensor PLUS** • 210 mm • 2.2 kW and 3.3 kW with powerBoost function ▪ Centre: 210/260/320 mm • 2.2/2.6/3.3 kW and 3.3/3.6/4.6 kW with powerBoost function ▪ Rear left: 180 mm • 1.8 kW and 2.5 kW with powerBoost function ▪ Rear right: 145 mm • 1.4 kW and 1.8 kW with powerBoost function
Supplied Accessories	
Dimensions (WxD)	▪ Appliance: 912 x 520 mm ▪ Cut-out: 880 x 490-500 mm
Technical Information	▪ 10.8 kW total connected load ▪ 220-240 V/50-60 Hz ▪ Fixed connection ▪ Installation from above

EH675ME21E 60 cm Induction Cooktop	
Cooktop type and Special Features	▪ **touchSlider** controls (mono) ▪ **frySensor PLUS** with 4 fry temperature ranges and 9 fully automatic fry programs ▪ 4 induction cooking zones: – 2 standard zones with frySensor – 2 standard zones
Comfort	▪ 17-stage power setting for each cooking zone ▪ LED timer and display for all cooking zones ▪ wipeProtection function ▪ Automatic time limit switch-off function
Speed	▪ powerBoost function for all cooking zones for less cooking time
Design	▪ Facette design with stainless steel side profiles and bevelled ceramic glass front ▪ Ceramic glass without decor ▪ Can be combined with Domino cooktops
Environment and Safety	▪ Automatic pan recognition ▪ 2-stage (hH) digital residual heat indicator for each cooking zone ▪ Childproof lock ▪ Sound buzzer ▪ Automatic safety switch-off ▪ Power ON indicator via on/off switch
Size/Power	▪ Front left: **frySensor PLUS** • 180 mm • 1.8 kW and 2.5 kW with powerBoost function ▪ Front right: **frySensor PLUS** • 210 mm • 2.2 kW and 3.3 kW with powerBoost function ▪ Rear left: 180 mm • 1.8 kW and 2.5 kW with powerBoost function ▪ Rear right: 145 mm • 1.4 kW and 1.8 kW with powerBoost function
Supplied Accessories	
Dimensions (WxD)	▪ Appliance: 602 x 520 mm ▪ Cut-out: 560 x 490-500 mm
Technical Information	▪ 7.2 kW total connected load ▪ 220-240 V/50-60 Hz ▪ Fixed connection ▪ Installation from above

Induction cooktops

EH675MD21E 60 cm Induction Cooktop	
Cooktop type and Special Features	▪ **touchSlider** controls (mono) ▪ **frySensor PLUS** with 4 fry temperature ranges and 9 fully automatic fry programs ▪ 3 induction cooking zones: – 1 triple circuit zone – 2 standard zones with frySensor
Comfort	▪ 17-stage power setting for each cooking zone ▪ LED timer and display for all cooking zones ▪ **XXL cooking zone** with 32 cm diameter ▪ wipeProtection function ▪ Automatic time limit switch-off function
Speed	▪ powerBoost function for all cooking zones for less cooking time
Design	▪ Facette design with stainless steel side profiles and bevelled ceramic glass front ▪ Ceramic glass without decor ▪ Can be combined with Domino cooktops
Environment and Safety	▪ Automatic pan recognition ▪ 2-stage (h/H) digital residual heat indicator for each cooking zone ▪ Childproof lock ▪ powerManagement function ▪ Sound buzzer ▪ Automatic safety switch-off ▪ Power ON indicator via on/off switch
Size/Power	▪ Left: 210/260/320 mm • 2.2/2.6/3.3 kW and 3.3/3.6/4.6 kW with powerBoost function ▪ Front right: **frySensor PLUS** • 180 mm • 1.8 kW and 2.5 kW with powerBoost function ▪ Rear right: **frySensor PLUS** • 145 mm • 1.4 kW and 1.8 kW with powerBoost function
Supplied Accessories	
Dimensions (WxD)	▪ Appliance: 602 x 520 mm ▪ Cut-out: 560 x 490-500 mm
Technical Information	▪ 6.8 kW total connected load ▪ 220-240 V/50-60 Hz ▪ Fixed connection ▪ Installation from above

Ceramic cooktops

ET875MC21D 80 cm Ceramic Cooktop	
Cooktop type and Special Features	▪ **touchSlider** controls (mono) ▪ **frySensor PLUS** with 4 fry temperature ranges and 9 fully automatic fry programs ▪ 4 highSpeed cooking zones: – 1 dual circuit zone with frySensor – 1 dual circuit zone/extended roasting zone – 1 dual circuit zone – 1 standard zone
Comfort	▪ 17-stage power setting for each cooking zone ▪ LED timer and display for all cooking zones ▪ wipeProtection function ▪ Automatic time limit switch-off function
Speed	
Design	▪ Facette design with stainless steel side profiles and bevelled ceramic glass front ▪ Ceramic glass without decor ▪ Can be combined with Domino cooktops
Environment and Safety	▪ 2-stage (h/H) digital residual heat indicator for each cooking zone ▪ Childproof lock ▪ Sound buzzer ▪ Automatic safety switch-off ▪ Power ON indicator via on/off switch
Size/Power	▪ Front left: **frySensor PLUS** • 120/210 mm • 0.8/2.2 kW ▪ Front right: 145/200/350 mm • 0.8/2.1/0.9 kW ▪ Centre: 180/220 mm • 1.5/2.4 kW ▪ Rear left: 145 mm • 1.2 kW
Supplied Accessories	
Dimensions (WxD)	▪ Appliance: 812 x 520 mm ▪ Cut-out: 780 x 500 mm
Technical Information	▪ 7.9 kW total connected load ▪ 220-240 V/50-60 Hz ▪ Fixed connection ▪ Installation from above

ET675MG21E 60 cm Ceramic Cooktop	
Cooktop type and Special Features	▪ **touchSlider** controls (mono) ▪ **frySensor PLUS** with 4 fry temperature ranges and 9 fully automatic fry programs ▪ 4 highSpeed cooking zones: – 1 dual circuit zone with frySensor – 1 dual circuit zone – 2 standard zones
Comfort	▪ 17-stage power setting for each cooking zone ▪ LED timer and display for all cooking zones ▪ wipeProtection function ▪ Automatic time limit switch-off function
Speed	
Design	▪ Facette design with stainless steel side profiles and bevelled ceramic glass front ▪ Ceramic glass without decor ▪ Can be combined with Domino cooktops
Environment and Safety	▪ 2-stage (h/H) digital residual heat indicator for each cooking zone ▪ Childproof lock ▪ Sound buzzer ▪ Automatic safety switch-off ▪ Power ON indicator via on/off switch
Size/Power	▪ Front left: 145 mm • 1.2kW ▪ Front right: **frySensor PLUS** • 120/180 mm • 0.8/2.0 kW ▪ Rear left: 120/210 mm • 0.8/2.2 kW ▪ Rear right: 145 mm • 1.2 kW
Supplied Accessories	
Dimensions (WxD)	▪ Appliance: 602 x 520 mm ▪ Cut-out: 560 x 490 mm
Technical Information	▪ 6.6 kW total connected load ▪ 220-240 V/50-60 Hz ▪ Fixed connection ▪ Installation from above

Discover the fascination of fire with Siemens gas cooktops

Our gas cooktops not only offer various configurations, they are also equipped with the latest in high-speed wok burner technology. The cast iron pan supports provide a strong contemporary look and a stable base for any pan size. Siemens cooktops are available in different trim types, including a stunning facetted front edge ceramic design with elegant brushed stainless steel side trims.

Design

Siemens gas cooktops are available in 60 and 90 cm widths, plus 30 cm wide domino models. Models vary in terms of configuration; combinations of economy, standard, high-power and wok burners in four or five burner versions. Whether your preference is for high-quality stainless steel or durable slimline ceramic glass, Siemens has the best performing cooktop for your needs.

Electronic ignition and flame failure

All Siemens gas cooktops feature a flame failure safety device fitted to each individual burner. If the flame is accidently extinguished, the thermostatic control senses the drop in temperature and blocks the gas flow to the individual burner. Ignition is achieved via the control dials – simply push and turn; there is no need to press a separate ignition button.

Wok burners

Siemens gas cooktops now feature wok burners delivering up to 20.0 Mj of power depending on the model – meeting the increasing demand for high-speed cooking. For optimum flexibility, selected wok burners offer dual control, which allow you to independently adjust the inner and outer flame rings from the same single control dial.

Simmer plate

Available for all Siemens gas cooktops, this special accessory fits on the smallest burner and is designed to diffuse the minimum power heat over a wider surface area. The simmer plate is designed to avoid hot spots and is the perfect solution for low-temperature cooking.

Gas cooktops

ER926SB90A 90 cm Gas Cooktop	
Cooktop type and Special Features	▪ 5 burner gas cooktop – 1 Wok burner – 1 high speed burner – 2 standard burners – 1 Economy burner
Comfort	▪ One-hand ignition ▪ Easy-to-use front-mounted controls ▪ Rotary control dial for each burner
Speed	▪ Dual circuit wok and rapid speed burner for less cooking time
Design	▪ Facette design with stainless steel side profiles and bevelled ceramic glass front ▪ Black ceramic glass base ▪ Metal-coated control dials ▪ Can be combined with Domino cooktops
Environment and Safety	▪ Flame failure device fitted to each burner ▪ Enamelled cast iron pan supports on non-scratch rubber feet
Size/Power	▪ Left: Wok burner 18.0 Mj ▪ Front centre: Standard burner 7.9 Mj ▪ Front right: Standard burner 7.9 Mj ▪ Rear centre: Economy burner 4.5 Mj ▪ Rear right: Rapid speed burner 11.5 Mj
Supplied Accessories	
Dimensions (WxD)	▪ Appliance: 915 x 520 mm ▪ Cut-out: 850 x 490 mm
Technical Information	▪ 49.8 Mj total connected load for gas ▪ 0.6 kW total connected load for electric ignition ▪ 240 V/50 Hz ▪ Suitable for natural gas (factory set-up) or LPG (via included conversion kit) ▪ Installation from above

EC945RB90A 90 cm Gas Cooktop	
Cooktop type and Special Features	▪ 5 burner gas cooktop – 1 Wok burner – 1 high speed burner – 2 standard burners – 1 Economy burner
Comfort	▪ One-hand ignition ▪ Easy-to-use front-mounted controls ▪ Rotary control dial for each burner
Speed	▪ Triple circuit wok and rapid speed burner for less cooking time
Design	▪ Stainless steel base ▪ Metal-coated control dials
Environment and Safety	▪ Flame failure device fitted to each burner ▪ Enamelled cast iron pan supports on non-scratch rubber feet
Size/Power	▪ Front left: Rapid speed burner 11.5 Mj ▪ Front right: Standard burner 6.8 Mj ▪ Centre: Wok burner 15.0 Mj ▪ Rear left: Economy burner 4 .0 Mj ▪ Rear right: Standard burner 6.8 Mj
Supplied Accessories	
Dimensions (WxD)	▪ Appliance: 915 x 520 mm ▪ Cut-out: 850 x 490 mm
Technical Information	▪ 44.1 Mj total connected load for gas ▪ 0.6 kW total connected load for electric ignition ▪ 240 V/50 Hz ▪ Suitable for natural gas (factory set-up) or LPG (via included conversion kit) ▪ Installation from above

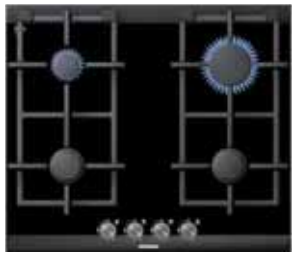

ER626PB90A 60 cm Gas Cooktop	
Cooktop type and Special Features	▪ 4 burner gas cooktop – 1 high speed burner – 2 standard burners – 1 Economy burner
Comfort	▪ One-hand ignition ▪ Easy-to-use front-mounted controls ▪ Rotary control dial for each burner ▪ Easy to clean ceramic glass base
Speed	▪ Rapid speed burner for less cooking time
Design	▪ Facette design with stainless steel side profiles and bevelled ceramic glass front ▪ Black ceramic glass base ▪ Metal-coated control dials ▪ Can be combined with Domino cooktops
Environment and Safety	▪ Flame failure device fitted to each burner ▪ Enamelled cast iron pan supports on non-scratch rubber feet
Size/Power	▪ Front left: Standard burner 7.9 Mj ▪ Front right: Standard burner 7.9 Mj ▪ Rear left: Economy burner 4.5 Mj ▪ Rear right: Rapid speed burner 11.5 Mj
Supplied Accessories	
Dimensions (WxD)	▪ Appliance: 602 x 520 mm ▪ Cut-out: 560 x 490 mm
Technical Information	▪ 31.8 Mj total connected load for gas ▪ 0.6 kW total connected load for electric ignition ▪ 240 V/50 Hz ▪ Suitable for natural gas (factory set-up) or LPG (via included conversion kit) ▪ Installation from above

ER14953AU 60 cm Gas Cooktop	
Cooktop type and Special Features	▪ 4 burner gas cooktop – 1 Wok burner – 2 standard burners – 1 Economy burner
Comfort	▪ One-hand ignition ▪ Easy-to-use side-mounted controls ▪ Rotary control dial for each burner
Speed	▪ Triple circuit wok burner for less cooking time
Design	▪ Stainless steel base ▪ Silver painted dials
Environment and Safety	▪ Flame failure device fitted to each burner ▪ Enamelled cast iron pan supports on non-scratch rubber feet
Size/Power	▪ Front left: Wok burner 14.0 Mj ▪ Front right: Economy burner 4.0 Mj ▪ Rear left: Standard burner 6.8 Mj ▪ Rear right: Standard burner 6.8 Mj
Supplied Accessories	
Dimensions (WxD)	▪ Appliance: 582 x 512 mm ▪ Cut-out: 560 x 490 mm
Technical Information	▪ 31.6 Mj total connected load for gas ▪ 0.6 kW total connected load for electric ignition ▪ 240 V/50 Hz ▪ Suitable for natural gas (factory set-up) or LPG (via included conversion kit) ▪ Installation from above

Domino cooktops give you the freedom of design

With the domino modular cooktops, Siemens gives you the freedom of designing your own cooking centre. Using a combination of gas, ceramic, induction, wok, BBQ grill and the Teppanyaki hot plate, these units can be built-in separately or combined together to create the ultimate cooking experience. The common connecting feature of all the Domino cooktops is the noble appearance of the black ceramic glass surface. Extremely robust and easy to keep clean, it is used on all of the modules and is exceptionally versatile.

Discover the taste of the great outdoors. Inside.

Whenever you like, the Siemens barbecue grill with touchSlider brings the succulent flavours right into your kitchen. The top-quality materials and harmonious design make this barbeque grill a perfect addition to the domino series modules. It can also be easily combined with other touchSlider cooktops by Siemens. Just a simple touch of the finger lets you precisely control the grill temperature to perfection.

A serve of Japanese influence

For those who love Japanese food, Teppanyaki cooking has long been an entertaining culinary delight. Siemens now offers you the Teppanyaki domino so you can prepare authentic Japanese dishes such as monjayaki, yakisoba, or okonomiyaki right in your own kitchen. The high-quality steel surface fits in perfectly with the domino series and can also be integrated into regular kitchens. With its stylish design, harmonious lines, and simple, convenient operation, the Teppanyaki module is ideal for any cooking enthusiast.

The fastest way to Asian specialties – the 20 Mj wok burner

For even more cooking power, at 20 Mj, this wok burner is one of the fastest in its class. Thanks to the dual function of the control dial, you can control both of the burner's flames with just one hand. That lets you operate the wok burner very quickly and easily. The flame can also be quickly reduced, providing greater safety and efficiency.

Domino cooktops

reddot design award winner 2009

reddot design award winner 2009

ET475MY11E 40 cm Teppanyaki Plate	
Cooktop type and Special Features	▪ **touchSlider** controls (mono) ▪ Domino Teppanyaki with 2 heating elements
Comfort	▪ 9-stage power setting for one or two heating elements ▪ Controlled temperature range from 160°C to 240°C ▪ LED timer and temperature display ▪ Keep warm function ▪ Automatic time limit switch off function
Speed	
Design	▪ Facette design with stainless steel base, side profiles and bevelled ceramic glass front ▪ Hard chrome plated frying area ▪ Can be combined with other 3- or 4-series Domino cooktops
Environment and Safety	▪ 2-pc heating element ▪ 2-stage (h/H) digital residual heat indicator ▪ Sound buzzer ▪ Overheat control device ▪ Automatic safety switch-off ▪ Power ON indicator via on/off switch
Size/Power	▪ 2 x 0.95 kW heating elements
Supplied Accessories	▪ Spatula
Dimensions (WxD)	▪ Appliance: 392 x 520 mm ▪ Cut-out: 360 x 490-500 mm
Technical Information	▪ 1.9 kW total connected load ▪ 220-240 V/50-60 Hz ▪ Installation from above

ET475MU11E 40 cm BBQ Grill	
Cooktop type and Special Features	▪ **touchSlider** controls (mono) ▪ Domino BBQ Grill with 2 heating elements
Comfort	▪ 9-stage power setting for each heating element ▪ Separate controls for each or both heating elements combined ▪ LED timer and display for both heating elements ▪ Pre-heating indicators ▪ Automatic time limit switch off function ▪ Removable cast iron grille for easy cleaning
Speed	
Design	▪ Facette design with stainless steel base, side profiles and bevelled ceramic glass front ▪ Stainless steel grilling trough ▪ Can be combined with other 3- or 4-series Domino cooktops
Environment and Safety	▪ 2-pc heating element (can be folded back for cleaning) ▪ Sound buzzer ▪ Overheat control device ▪ Automatic safety switch-off ▪ Power ON indicator via on/off switch ▪ Mechanical drain valve
Size/Power	▪ 2 x 1.7 kW heating elements ▪ 2.5 litre basin capacity
Supplied Accessories	▪ Lava stones
Dimensions (WxD)	▪ Appliance: 392 x 520 mm ▪ Cut-out: 360 x 490-500 mm
Technical Information	▪ 3.4 kW total connected load ▪ 220-240 V/50-60 Hz ▪ Installation from above

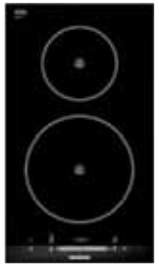

EH375ME11E 30 cm Induction Cooktop	
Cooktop type and Special Features	▪ **touchSlider** controls (mono) ▪ Domino cooktop with 2 induction cooking zones – 2 standard zones
Comfort	▪ 17-stage power setting for each cooking zone ▪ LED timer and display for all cooking zones ▪ Automatic time limit switch off function
Speed	▪ powerBoost function for all cooking zones for less cooking time
Design	▪ Facette design with stainless steel side profiles and bevelled ceramic glass front ▪ Ceramic glass without decor ▪ Can be combined with other 3- or 4-series Domino cooktops
Environment and Safety	▪ Automatic pan recognition ▪ 2-stage (h/H) digital residual heat indicator for each cooking zone ▪ Sound buzzer ▪ Automatic safety switch-off ▪ Power ON indicator via on/off switch
Size/Power	▪ Front: 210 mm • 2.2 kW and 3.3 kW with powerBoost function ▪ Rear: 150 mm • 1.4 kW and 1.8 kW with powerBoost function
Supplied Accessories	
Dimensions (WxD)	▪ Appliance: 302 x 520 mm ▪ Cut-out: 270 x 490-500 mm
Technical Information	▪ 3.6 kW total connected load ▪ 220-240 V/50-60 Hz ▪ Installation from above

ET375MF11E 30 cm Ceramic Cooktop	
Cooktop type and Special Features	▪ **touchSlider** controls (mono) ▪ Domino cooktop with 2 highSpeed cooking zones – 1 dual circuit zone – 1 standard zone
Comfort	▪ 17-stage power setting for each cooking zone ▪ LED timer and display for all cooking zones ▪ Automatic time limit switch off function
Speed	
Design	▪ Facette design with stainless steel side profiles and bevelled ceramic glass front ▪ Ceramic glass without decor ▪ Can be combined with other 3- or 4-series Domino cooktops
Environment and Safety	▪ 2-stage (h/H) digital residual heat indicator for each cooking zone ▪ Sound buzzer ▪ Automatic safety switch-off ▪ Power ON indicator via on/off switch
Size/Power	▪ Front: 120/180 mm • 0.8/2.0 kW ▪ Rear: 145 mm • 1.2 kW
Supplied Accessories	▪ Glass scraper
Dimensions (WxD)	▪ Appliance: 302 x 520 mm ▪ Cut-out: 270 x 490-500 mm
Technical Information	▪ 3.2 kW total connected load ▪ 220-240 V/50-60 Hz ▪ Installation from above

Domino cooktops

ER326BB90A 30 cm Gas Cooktop	
Cooktop type and Special Features	▪ Domino cooktop with 2 gas burners – 1 Wok burner
Comfort	▪ One-hand ignition ▪ Easy-to-use front-mounted controls ▪ Rotary control dial for each burner
Speed	▪ Rapid speed burner for less cooking time
Design	▪ Facette design with stainless steel side profiles and bevelled ceramic glass front ▪ Black ceramic glass base ▪ Metal-coated control dials ▪ Can be combined with other 3- or 4-series Domino cooktops
Environment and Safety	▪ Flame failure device fitted to each burner ▪ Enamelled cast iron pan support on non-scratch rubber feet
Size/Power	▪ Front: Standard burner 7.9 Mj ▪ Rear: Rapid speed burner 11.5 Mj
Supplied Accessories	▪ Espresso cross support ▪ LPG conversion kit (nozzle, governor, test point)
Dimensions (HxWxD)	▪ Appliance: 302 x 520 mm ▪ Cut-out: 270 x 490-500 mm
Technical Information	▪ 19.4 Mj total connected load for gas ▪ 0.6 kW total connected load for electric ignition ▪ 240 V/50 Hz ▪ Suitable for natural gas (factory set-up) or LPG (via included conversion kit) ▪ Installation from above

ER326AB90A 30 cm Wok Gas Cooktop	
Cooktop type and Special Features	▪ Domino cooktop with wok burner – 1 Wok burner
Comfort	▪ One-hand ignition ▪ Easy-to-use front-mounted control ▪ Rotary control dial
Speed	▪ Dual circuit wok burner for less cooking time
Design	▪ Facette design with stainless steel side profiles and bevelled ceramic glass front ▪ Black ceramic glass base ▪ Metal-coated control dial ▪ Can be combined with other 3- or 4-series Domino cooktops
Environment and Safety	▪ Flame failure device fitted to each burner ▪ Enamelled cast iron pan support on non-scratch rubber feet
Size/Power	▪ Centre: Wok burner 20.0 Mj
Supplied Accessories	▪ Wok attachment ring ▪ Espresso cross support ▪ LPG conversion kit (nozzle, governor, test point)
Dimensions (HxWxD)	▪ Appliance: 302 x 520 mm ▪ Cut-out: 270 x 490-500 mm
Technical Information	▪ 20 Mj total connected load for gas ▪ 0.6 kW total connected load for electric ignition ▪ 240 V/50 Hz ▪ Suitable for natural gas (factory set-up) or LPG (via included conversion kit) ▪ Installation from above

Part No.	Description	For models
HZ298103	Wok for gas cooktops – stainless steel	ER926SB90A EC945RB90A ER14953AU ER326AB90A
HZ298105	Simmer plate for gas cooktops – 20x20 cm	ER926SB90A ER626PB90A EC945RB90A ER14953AU ER326AB90A ER326BB90A
HZ298119	Gas cookware set 3-pc including fry pan	ER926SB90A ER626PB90A EC945RB90A ER14953AU ER326AB90A ER326BB90A
HZ390020	2-pc iittala induction cookware set consisting 1 pot and 1 fry pan	EH375ME11E ET375MF11E EH901SK11E EH975ME11E
HZ390030	3-pc iittala induction cookware set consisting 2 pots and 1 casserole	EH975MD21E EH675ME21E EH675MD21E ET875MC21D ET675MG21E
HZ390040	4-pc iittala induction cookware set consisting 2 pots, 1 casserole and 1 fry pan	EH901SK11E EH975ME11E

Part No.	Description	For models
HZ390090	Wok for induction and ceramic cooktops – Stainless steel – Includes glass lid and draining grid	EH901SK11E EH975ME11E EH975MD21E EH675ME21E EH675MD21E EH375ME11E ET875MC21D ET675MG21E ET375MF11E
HZ390210	Fry pan for induction/ceramic cooktops with frySensor PLUS – Small 20 cm ø	EH975MD21E EH675ME21E EH675MD21E ET875MC21D ET675MG21E
HZ390220	Fry pan for induction/ceramic cooktops with frySensor PLUS – Medium 24 cm ø	EH975MD21E EH675ME21E EH675MD21E ET875MC21D ET675MG21E
HZ390230	Fry pan for induction/ceramic cooktops with frySensor PLUS – Large 26 cm ø	EH975MD21E EH675ME21E EH675MD21E ET875MC21D ET675MG21E
HZ390260	Paella fry pan for induction/ceramic cooktops – XL 32 cm ø	EH975MD21E EH675MD21E EH901SK11E
HZ394301	Connection rail for the combination of dominos/cooktops	EH375ME11E ET375MF11E ER326AB90A ER326BB90A ET475MU11E ET475MY11E ET875MC21D ET675MG21E EH975MD21E EH675ME21E EH675MD21E ER926SB90A ER626PB90A

Stylish, yet hardworking. Efficient rangehoods from Siemens.

A kitchen is not complete without an efficient rangehood to protect against condensation, grease and cooking odours. Siemens rangehoods have been designed to complement and blend in seamlessly with the sleek lines of Siemens appliances. Discover the range of quiet and powerful rangehoods.

Classic Siemens design

Designed to coordinate with other Siemens cooking appliances, our rangehoods' contemporary looks are showcased in the LC958BA90, which shares the same lightControl operational concept as our top of the range ovens.

Intensive setting with automatic reset facility

The intensive setting gives an extra boost to the extraction level and is particularly useful when extra extraction is needed, for example, during stir-frying. As the intensive setting is only required for a short period of time, the rangehood will automatically revert to a lower speed setting after a few minutes.

Please check individual specifications for this feature.

Softlight dimmer function

Thanks to the dimmer light function, you can set the brightness of the rangehood to provide atmospheric lighting in the kitchen. When the light is switched on, the light builds up gradually to the chosen setting. Similarly, when you switch the light off, the light gradually fades away. When the light is on, its intensity can also be adjusted to suit your individual requirements.

Auto run-on facility

Some models have an automatic run-on facility, which keeps the rangehood working for an additional 10 minutes and helps remove any lingering cooking odours.

Ultra-sound control sensors

Siemens has developed a special sensor that uses ultra-sound to detect steam and automatically adjusts the extraction power to the most suitable setting.

Please check individual specifications for this feature.

varioControl

Available on the LI49632 and LI48932 slideout rangehood, the position of the controls can be set to four different positions to suit your own individual requirements. The control can be mounted on the front edge, front top or positioned on the right or left hand side of the rangehood. It also has the option to fit a stainless steel décor panel strip.

Intermittent operation

This setting allows the hood to ventilate the kitchen at hourly intervals using the lowest fan setting. The fan operates every hour for approximately five minutes at the lowest setting and is ideal for removing lingering odours.

Bright lighting

Every hood model offers excellent illumination of the cooktop surface. The 20 W halogen bulbs (on most of the range) emit a bright, white light and are more efficient than standard bulbs.

Noise levels and sound insulation

There are two commonly used measures for noise levels – sound pressure (dBA) and sound power (dB). Although dBA (sound pressure) is the most quoted, the results can vary accordingly. Siemens prefer to use the sound power (dB) method, which requires measurements to be made under strict testing criteria in a sound insulated room. This ensures meaningful comparisons can be made between different models tested in this way. Many Siemens models have additional sound insulation around the motor to keep noise as low as possible.

Dishwasher-safe metal grease filters and filter boxes

All the metal grease filters on Siemens rangehoods can be cleaned in a dishwasher. Some models (particularly those with glass canopies) have their filters in a box, which are also removable and can be washed in a dishwasher.

Pivoting glass canopy

As well as touch-control operation, the model LC955KA40 features a glass canopy that pivots up and down, providing easier access to the cooktop, together with maximum steam capture when you need it most.

Rim ventilation function

The LC958BA90 model features stylish clip on covers, which not only have a premium appearance, they also conceal the grease filters. Solid covers also allow for 'rim ventilation', where the air is extracted around the edges of the cover and then filtered.

Electronic saturation display

As filters become saturated with grease, extraction performance deteriorates. So to ensure that the rangehood always works as efficiently and safely as possible, the rangehood will automatically advise when the filters need cleaning or replacing.

Please check individual specifications for this feature.

Ducting

For optimum performance, your Siemens rangehood should be ducted to the outside of the house by using the correct ducting size. The larger the ducting size, the more volume of air can be extracted and the quieter the rangehood will be. All Siemens rangehoods are suitable for use with a 120 mm diameter ducting as standard. Use of ducting with a lesser diameter should be avoided wherever possible. Some models offer the option of increasing this to an even larger 150 mm size, which helps increase efficiency and lowers noise levels even further. Ducting lengths should be as short and as direct as possible to ensure air is extracted as quickly as possible. Bends should be kept to a minimum and the ducting itself should be as even as possible to ensure smooth, unobstructed air flow.

Powerful extraction

To ensure your Siemens rangehood is powerful enough to effectively remove moisture and cooking odours, as a guide, the hood must be able to change the air in the kitchen between 6-10 times per hour. To choose the correct rangehood, first, calculate the volume of the kitchen (HxWxD metres). Then divide the maximum extraction rate of your chosen rangehood by the volume of the room. In order to ensure extraction performance, this figure should be as close to 10 as possible;

Example: 4m x 3m x 2.4m = 28.8m3

10 changes per hour = 10 x 28.8m3 = 288m3/h

i.e. Rangehood must achieve a minimum of 288m3/h

Minimal noise

To avoid excessive noise, we suggest selecting a model which meets the extraction requirements on an intermediate speed (e.g. level 2) rather than at the highest speed.

Part No.	Description	For models
LZ45500	Re-circulation set/charcoal filter	LI46630 LI49632 LI48932
LZ46050	Stainless steel finish pelmet	LI46630 LI49632
LZ46150	Stainless steel finish pelmet for front-mounted varioControl	LI49632
LZ49050	Stainless steel finish pelmet	LI48932
LZ49100	Mounting kit for 90 cm cupboard	LI48932
LZ49150	Stainless steel finish pelmet for front mounted varioControl	LI48932
LZ51605	Re-circulation set/charcoal filter	LC958WA60
LZ51850	Re-circulation set/charcoal filter	LC955KA40
LZ52450	Re-circulation set/charcoal filter	LC958BA90 LC958BB60
LZ54050	Re-circulation set/charcoal filter	LF157GA60
LZ73050	Re-circulation set/charcoal filter	LB75564

Canopy hoods

LC955KA40 90 cm Wall Mounted Canopy Rangehood with Glass Screen	
Power and Mode of Operation	▪ 550 m3/h max. extraction rate (150 mm ducted) ▪ Ducted or recirculating operation
Comfort	▪ Electronic touch controls with LED display ▪ **convenience**Plus – adjustable glass screen for heads free operation ▪ Powerful single motor with twin fan ▪ 3 power levels plus intensive setting ▪ Automatic 10 minute run-on function ▪ Intensive setting with automatic reset function ▪ Front and side ventilation system ▪ Dishwasher-safe metal grease filter collector ▪ Electronic saturation display for metal grease and active carbon filter
Design	▪ Stainless steel/Glass ▪ Light concept white ▪ Halogen **softLight** with dimming function
Environment and Safety	▪ Very quite operation: only 56 dB at 370 m^3/h (Level 2, 150 mm ducted)
Supplied Accessories	
Dimensions (HxWxD)	▪ Appliance (ducted air): 830-1144 x 900 x 507 mm ▪ Appliance (recirculated air): 890-1195 x 900 x 507 mm
Technical Information	▪ 240 W total connected load ▪ 200 W total motor load ▪ 2 x 20 W halogen lights ▪ 120 or 150 mm tube connection diameter ▪ 220-240 V/50 Hz
Optional Accessories	▪ LZ51850 – starter kit for recirculated operation

Canopy hoods

LF157GA60 100 cm Island Canopy Rangehood with Glass Screen	
Power and Mode of Operation	▪ 720 m3/h max. extraction rate (150 mm ducted) ▪ Ducted or recirculating operation
Comfort	▪ Electronic controls with low-lift push buttons on both sides ▪ LED display ▪ Powerful single motor with twin fan ▪ 3 power levels plus intensive setting ▪ Intensive setting with automatic reset function ▪ Additional rim ventilation system ▪ Dishwasher-safe metal grease filter ▪ Electronic saturation display for metal grease and active carbon filter
Design	▪ Stainless steel/Glass ▪ Light concept white ▪ Halogen **softLight** with dimming function
Environment and Safety	▪ Whisper quite operation: only 55 dB at 400 m^3/h (Level 2, 150 mm ducted) ▪ Additional sound insulation mats for optimised sound absorption
Supplied Accessories	
Dimensions (HxWxD)	▪ Appliance (ducted air): 830-1144 x 900 x 507 mm ▪ Appliance (recirculated air): 890-1195 x 900 x 507 mm
Technical Information	▪ 295 W total connected load ▪ 215 W total motor load ▪ 4 x 20 W halogen lights ▪ 120 or 150 mm tube connection diameter ▪ 220-240 V/50 Hz
Optional Accessories	▪ LZ54050 – starter kit for recirculated operation

LC958BA90 90 cm Wall Mounted Canopy Rangehood	
Power and Mode of Operation	▪ 820 m3/h max. extraction rate (150 mm ducted) ▪ Ducted or recirculating operation
Comfort	▪ lightControl ▪ Electronic clock/timer with LED display ▪ **Text display** with 25 different languages ▪ Powerful single motor with twin fan ▪ 3 power levels plus intensive setting ▪ Intermittent ventilation function ▪ Rim ventilation facility ▪ Automatic 10 minute run-on function ▪ Intensive setting with automatic reset function ▪ On/Off LED indicator light ▪ 2 dishwasher-safe metal grease filters with stainless steel cover ▪ Electronic saturation display for metal grease and active carbon filters
Design	▪ Stainless steel ▪ Light concept white/blue ▪ Retractable and illuminated metallic rotary control ▪ Halogen **softLight** with dimming function
Environment and Safety	▪ **Extremely quite** operation: only 46 dB at 330 m^3/h (Level 1, 150 mm ducted) ▪ Additional sound insulation mats for optimised sound absorption
Supplied Accessories	
Dimensions (HxWxD)	▪ Appliance (ducted air): 700-1105 x 900 x 520 mm ▪ Appliance (recirculated air): 775-1220 x 900 x 520 mm
Technical Information	▪ 320 W total connected load ▪ 260 W total motor load ▪ 3 x 20 W halogen lights ▪ 120 or 150 mm tube connection diameter ▪ 220-240 V/50 Hz
Optional Accessories	▪ LZ52450 – starter kit for recirculated operation

LC958BB60 90 cm Wall Mounted Canopy Rangehood	
Power and Mode of Operation	▪ 820 m3/h max. extraction rate (150 mm ducted) ▪ Ducted or recirculating operation
Comfort	▪ Electronic controls with low-lift push buttons ▪ Powerful single motor with twin fan ▪ 3 power levels plus intensive setting ▪ Automatic 10 minute run-on function ▪ Intensive setting with automatic reset function ▪ On/Off LED indicator light ▪ 2 dishwasher-safe metal grease filters with stainless steel cover ▪ Electronic saturation display for metal grease and active carbon filters
Design	▪ Stainless steel ▪ Light concept white ▪ **slimLine** design ▪ Halogen **softLight** with dimming function
Environment and Safety	▪ **Extremely quite** operation: only 46 dB at 320 m^3/h (Level 1, 150 mm ducted) ▪ Additional sound insulation mats for optimised sound absorption
Supplied Accessories	
Dimensions (HxWxD)	▪ Appliance (ducted air): 625-1069 x 900 x 500 mm ▪ Appliance (recirculated air): 625-954 x 900 x 500 mm
Technical Information	▪ 320 W total connected load ▪ 260 W total motor load ▪ 3 x 20 W halogen lights ▪ 120 or 150 mm tube connection diameter ▪ 220-240 V/50 Hz
Optional Accessories	▪ LZ52450 – starter kit for recirculated operation

LC958WA60 90 cm Wall Mounted Canopy Rangehood	
Power and Mode of Operation	▪ 820 m3/h max. extraction rate (150 mm ducted) ▪ Ducted or recirculating operation
Comfort	▪ Electronic controls with low-lift push buttons ▪ LED display ▪ Powerful single motor with twin fan ▪ 3 power levels plus intensive setting ▪ Automatic 10 minute run-on function ▪ Intensive setting with automatic reset function ▪ On/Off LED indicator lights ▪ 2 dishwasher-safe metal grease filters with stainless steel cover ▪ Electronic saturation display for metal grease and active carbon filters
Design	▪ Stainless steel ▪ **slimLine** design ▪ Halogen **softLight** with dimming function ▪ Light concept white
Environment and Safety	▪ **Extremely quite** operation: only 46 dB at 330 m^3/h (Level 1, 150 mm ducted) ▪ Additional sound insulation mats for optimised sound absorption
Supplied Accessories	
Dimensions (HxWxD)	▪ Appliance (ducted air): 700-1105 x 900 x 520 mm ▪ Appliance (recirculated air): 775-1220 x 900 x 520 mm
Technical Information	▪ 320 W total connected load ▪ 260 W total motor load ▪ 3 x 20 W halogen lights ▪ 120 or 150 mm tube connection diameter ▪ 220-240 V/50 Hz
Optional Accessories	▪ LZ51605 – starter kit for recirculated operation

Slideout hoods

LB75564 73 cm Integrated Rangehood	
Power and Mode of Operation	▪ 650 m3/h max. extraction rate (150 mm ducted) ▪ Ducted or recirculating operation
Comfort	▪ Powerful twin motor ▪ 3 power levels plus intensive setting ▪ 2 dishwasher-safe metal grease filters
Design	▪ Metallic silver ▪ Halogen lights
Environment and Safety	▪ Very quite operation: only 56 dB at 320 m^3/h (Level 2, 150 mm ducted)
Supplied Accessories	
Dimensions (HxWxD)	▪ Appliance (ducted & recirculated): 255 x 730 x 380 mm ▪ Cut-out: 255 x 700 x 350 mm
Technical Information	▪ 240 W total connected load ▪ 200 W total twin motor load ▪ 2 x 20 W halogen lights ▪ 120 or 150 mm tube connection diameter ▪ 220-240 V/50 Hz
Optional Accessories	▪ LZ73050 – starter kit for recirculated operation

LI48932 90 cm Slideout Rangehood	
Power and Mode of Operation	▪ 700 m3/h max. extraction rate (150 mm ducted) ▪ Ducted or recirculating operation
Comfort	▪ **varioControl** – variable electronic low-lift push-button control mountable at front, top or side ▪ LED display ▪ Powerful twin motor ▪ 3 power levels plus intensive setting ▪ Automatic 10 minute run-on function ▪ Intensive setting with automatic reset function ▪ On/Off LED indicator lights ▪ 2 dishwasher-safe metal grease filters ▪ Electronic saturation display for metal grease and active carbon filters
Design	▪ Metallic silver ▪ Halogen **softLight** with dimming function ▪ Front profile décor strip or pelmet required (not supplied with rangehood) ▪ Light concept white
Environment and Safety	▪ Whisper quite operation: only 53 dB at 350 m^3/h (Level 2, 150 mm ducted)
Supplied Accessories	
Dimensions (HxWxD)	▪ Appliance (ducted & recirculated): 475 x 894 x 293-448 mm ▪ Cut-out: 435 x 556 x 273 mm
Technical Information	▪ 260 W total connected load ▪ 200 W total twin motor load ▪ 3 x 20 W halogen lights ▪ 120 or 150 mm tube connection diameter ▪ 220-240 V/50 Hz
Optional Accessories	▪ LZ49050 – stainless steel finish pelmet with brand logo ▪ LZ49100 – Installation kit for 90 cm wall cabinets ▪ LZ49150 – stainless steel finish pelmet for front mounted varioControl ▪ LZ45500 – starter kit for recirculated operation

LI49632 60 cm Slideout Rangehood	
Power and Mode of Operation	▪ 700 m3/h max. extraction rate (150 mm ducted) ▪ Ducted or recirculating operation
Comfort	▪ **varioControl** – variable electronic low-lift push-button control mountable at front, top or side ▪ LED display ▪ Powerful twin motor ▪ **sensorControl** automatic power adjustment via ultrasound sensor ▪ 3 power levels plus intensive setting ▪ Automatic 10 minute run-on function ▪ Intensive setting with automatic reset function ▪ On/Off LED indicator lights ▪ 2 dishwasher-safe metal grease filters ▪ Electronic saturation display for metal grease and active carbon filters
Design	▪ Metallic silver ▪ Halogen **softLight** with dimming function ▪ Front profile décor strip or pelmet required (not supplied with rangehood) ▪ Light concept white
Environment and Safety	▪ Whisper quite operation: only 51 dB at 350 m^3/h (Level 2, 150 mm ducted) ▪ Additional sound insulation mats for optimised sound absorption
Supplied Accessories	
Dimensions (HxWxD)	▪ Appliance (ducted & recirculated): 465 x 594 x 293-448 mm ▪ Cut-out: 435 x 556 x 273 mm
Technical Information	▪ 240 W total connected load ▪ 200 W total twin motor load ▪ 2 x 20 W halogen lights ▪ 120 or 150 mm tube connection diameter ▪ 220-240 V/50 Hz
Optional Accessories	▪ LZ46050 – stainless steel finish pelmet with brand logo ▪ LZ46150 – stainless steel finish pelmet for front mounted varioControl ▪ LZ45500 – starter kit for recirculated operation

LI46630 60 cm Slideout Rangehood	
Power and Mode of Operation	▪ 700 m3/h max. extraction rate (150 mm ducted) ▪ Ducted or recirculating operation
Comfort	▪ Powerful twin motor ▪ 3 power levels plus intensive setting ▪ Slide switch controls for power and light ▪ On/Off LED indicator lights ▪ 2 dishwasher-safe metal grease filters ▪ Electronic saturation display for metal grease filters
Design	▪ Metallic silver ▪ Halogen lights ▪ Front profile décor strip or pelmet required (not supplied with rangehood)
Environment and Safety	▪ Whisper quite operation: only 53 dB at 350 m^3/h (Level 2, 150 mm ducted)
Supplied Accessories	
Dimensions (HxWxD)	▪ Appliance (ducted & recirculated): 465 x 594 x 293-448 mm ▪ Cut-out: 435 x 556 x 273 mm
Technical Information	▪ 240 W total connected load ▪ 200 W total twin motor load ▪ 2 x 20 W halogen lights ▪ 120 or 150 mm tube connection diameter ▪ 220-240 V/50 Hz
Optional Accessories	▪ LZ46050 – stainless steel finish pelmet with brand logo ▪ LZ45500 – starter kit for recirculated operation

If you want more luxury, don’t settle for anything less.

Behind the high-quality Siemens aCool line of built-in refrigeration solutions, there is a new premium concept in a form you’ve never seen before. With everything from innovative cooling technology and intelligent design solutions, aCool is the perfect melding of performance, luxury and energy efficiency.

One of many combinations

White wine? Red wine? Rosé? Broccoli at eye level? Steaks at the bottom? Arrange your foods however you like. In the Siemens aCool refrigerator, sensor controls ensure optimal storage for all of your items. The freshProtectBox offers individual temperature control and handles the varying requirements of your refrigerated items, keeping them fresh for significantly longer. And our vinoThek, with its two temperature zones, has room for 98 bottles and a glass door with UV protection that can compete with any wine cellar.

Good design won’t leave you cold

A real eye-catcher in your kitchen: aCool appliances don’t just keep things cold – they’ll impress everyone who sees their strikingly cool design. The ice and water dispenser provide cold water, ice cubes, and crushed ice for refreshment whenever the mood strikes. The icemaker is located inside the freezer and can produce up to 2.5 kg of ice cubes in 24 hours. So go ahead, invite a few more people to the party to celebrate your new Siemens kitchen. And thanks to our noFrost technology, you’ll never have to defrost again.

Your food made beautiful

The unique multiAirflow system in the refrigerator ensures that cold air is distributed evenly, both inside the refrigerator and along the inside of the door. There are air outlets at each level that feed fresh air from the air channel on the back of the unit into the refrigerator itself. To ensure that odors don't travel throughout the refrigerator, the butter and cheese compartment is equipped with a magnetic seal. After all, sometimes it's better when intense aromas keep to themselves.

Create the optimal climate for your groceries: the freshProtectBox

The freshProtectBox is the luxury suite in your refrigerator. You can set the temperature in the box completely independently of the temperature in the rest of the refrigerator to 3°C, 1.5°C or 0°C. And the freshProtectBox even has its own light, so you'll never have to hunt for your fine treats.

Ergonomic access: flexible, fully extendable drawers

The fully extendable drawers glide effortlessly and provide quick access to your food when you need it. The vegetable drawer is also equipped with a manual temperature and humidity control system. If the slide is closed, the humidity is high – fruit and vegetables stay crisper. And the curved drawer bottom prevents items from touching and developing bruises, providing the ultimate storage solution.

Refrigeration in high-tech style

When you choose the aCool refrigerator, you're choosing a refrigeration system that definitely knows the difference between fruits and fruits de mer. Sensor controls, the multiAirflow system, and the freshProtectBox – with its own independent temperature control – all ensure that a wide variety of foods will have the ultimate storage climate in your refrigerator. And should you ever need more space for large items, you can always adjust the motorized glass shelf at the touch of a button, without the need to empty and rearrange shelves.

Make room with the motorised adjustable shelf

To save you from having to empty a shelf and then rearrange everything again, we've equipped the aCool refrigerator with a motorized glass shelf. This allows you to quickly and easily adjust the sizes of each space inside your refrigerator's main compartment. The glass shelf can be adjusted up to 10 cm up and down.

A fresh breeze inside your fridge: the multiAirflow system

The multiAirflow system ensures the air in the refrigeration compartment is evenly distributed. This keeps the temperature constant, even if the door was accidentally left open for a short period of time. When you add warm foods to the refrigerator, they also cool faster, which helps capture their freshness.

Perfect control: aCool electronics

This is refrigeration using the most advanced technology: navigate the refrigerator menu using the clear text digital display. You can set the user language and have the refrigerator show display the exact temperature. And if you should forget to shut the door, your refrigerator will alert you with both a visual and audio warning signal. Select the Eco Mode to save energy – or just switch your refrigerator to the vacation setting before you leave.

Seal in the goodness

To make sure the aromas of your Tilsit cheese stay away from your fresh strawberries, we've equipped the butter and cheese compartment with a magnetic seal. This guarantees that intense odors stay where they belong.

Well cooled and well lit: the halogen light

To ensure you can quickly see what delicious treats are nestled inside your refrigerator, the ceiling, side walls, and interior of the freshProtectBox are equipped with halogen lights.

Access all areas

Thanks to our new flat hinges, getting to your refrigerated items is easier than ever. Open the main door to a 90 degree angle and you will be able to fully extend all drawers. The main door can open as widely as 115 degrees. The ventilation system is also completely hidden in the base. That's also where you'll find the water filter, which is easy to access and replace. Stainless steel bases are available as a special accessory.

Give your leg of lamb the cold shoulder in the aCool freezer

Cold drinks: Fast

The freezer's water and ice dispenser provide cold water and ice cubes as well as crushed ice for a drink at the touch of a button. The icemaker inside the unit can also produce up to 2.5 kg of ice cubes in 24 hours. To keep you from having to tilt heavy carafes while you fill them, we've equipped the drink dispenser with a fold-out holder for large pitchers and glassware.

Ergonomic access: flexible, fully extendable drawers

The fully extendable drawers glide effortlessly and provide quick access to your food when you need it. The vegetable drawer is also equipped with a manual temperature and humidity control system. If the slide is closed, the humidity is high – fruit and vegetables stay crisper. And the curved drawer bottom prevents items from touching and developing bruises, providing the ultimate storage solution.

Beautifully hygienic: metal shelves

Metal shelves not only look elegant, but have very concrete benefits too. They are especially durable, high-quality items that are also very easy to clean, ensuring optimal hygiene at all times.

The perfect place for your fine wines is in the aCool vinoThek

Perfect protection: the glass door with integrated UV filter

The aCool vinoThek will always give you an unobstructed view of your fine wines. And to ensure that your wines won't be damaged by harmful UV radiation on sunny days, the aCool vinoThek's glass door is equipped with a UV filter.

The best climate for your wine: dual temperature zones

Make your wines' every wish come true. With the dual temperature zones, each of your prized vintages can be stored under the best possible conditions. For example, you can keep your white wines in the lower temperature zone, while increasing the temperature in the upper zone for your delicate reds. The LED lighting system is strategically positioned to display your wine to perfection without affecting the internal temperature. And because an active charcoal filter keeps the air inside the aCool vinoThek fresh, your treasured wines are stored to perfection without absorbing unwanted odours.

Fully extendable shelves

With 14 shelves and seven bottles per shelf, your vinoThek can cradle 98 bottles of wine. To ensure that you can easily access and inspect each and every one of them, every shelf, with the exception of the two fixed in place to distinguish the cooling zones, rest on a smooth-sliding rail system, making it easy to extend as required.

reddot design award winner 2009

FI24DP30AU aCool Built-in Freezer	
Refrigerator Type and Volume	▪ aCool built-in 24" freezer with in-door water and ice dispenser ▪ noFrost multi-airflow system ▪ 320 litre gross volume
Controls	▪ Electronic temperature control ▪ **LED text display** with 16 different languages ▪ Holiday mode ▪ Sabbath mode ▪ Eco mode ▪ Acoustic door alarm
Comfort	▪ Illuminated dispenser for chilled water, crushed ice or ice cubes ▪ superFreeze function ▪ Halogen illumination in ceiling ▪ **Extremely quiet** operation
Shelving and Compartments	▪ 4 metal shelves – 2 are height-adjustable ▪ 2 metal containers on fully extendable telescopic rails ▪ 2 door shelves including 1 with lid ▪ Inner metal liner
Configuration	▪ **Left hinged door, not reversible** ▪ Complete ventilation through plinth ▪ Variable plinth adaption from 102 to 181 mm ▪ Door aperture angle 115˚
Supplied Accessories	▪ Water connection hose 3 m, 3/4"
Dimensions (HxWxD)	▪ Appliance: 2125 x 603 x 608 mm ▪ Cut-out: 2134 x 610 x 610 mm
Technical Information	▪ 4.5 Star Energy Rating, 448 kWh per year ▪ Freezing capacity: 14 kg in 24 hours ▪ Storage time in power failure: 14 hours ▪ Fixed water connection with 3 m hose, 3/4" ▪ 592W total connected load ▪ 220-240V/50Hz ▪ Climate class: SN-T
Optional Accessories	▪ CI10Z090 – Stainless steel door handle ▪ FI24Z290 – Stainless steel door panel ▪ FI24Z300 – Stainless steel ventilation grill for left hinged door ▪ FI50Z000 – Water filter ▪ CI60Z000 – Installation kit for side-by-side combination ▪ CI60Z100 – Installation kit with heating for side-by-side combination; required when installed with 0.5-16 cm distance

CI24RP00AU aCool Built-in Refrigerator	
Refrigerator Type and Volume	▪ aCool built-in 24" refrigerator ▪ noFrost multi-airflow system ▪ 375 litre gross volume
Controls	▪ Electronic temperature control ▪ **LED text display** with 16 different languages ▪ Holiday mode ▪ Sabbath mode ▪ Eco mode ▪ Acoustic door alarm
Comfort	▪ **airFresh filter** ▪ superCool function ▪ Halogen illumination in ceiling and side ▪ **Extremely quiet** operation
Shelving and Compartments	▪ 4 safety glass shelves – 3 are height-adjustable including the **motorised top shelf** ▪ 1 transparent deli-drawer on fully extendable telescopic rails ▪ 1 transparent, humidity controlled crisper on fully extendable telescopic rails ▪ 1 transparent, electronic temperature controlled **freshProtectBox** on fully extendable telescopic rails, 57 litre volume with additional illumination and separate temperature control of 0˚, 1.5˚ and 3˚C ▪ Dairy compartment with magnetic lid for hermetically sealed food ▪ 2 deep door shelves ▪ 1 extra deep door shelf ▪ Inner metal liner
Configuration	▪ Right hinged door, reversible to left hinged door ▪ Complete ventilation through plinth ▪ Variable plinth adaption from 102 to 181 mm ▪ Door aperture angle 115˚
Supplied Accessories	▪ 2 egg racks
Dimensions (HxWxD)	▪ Appliance: 2125 x 603 x 608 mm ▪ Cut-out: 2134 x 610 x 610 mm
Technical Information	▪ 6 Star Energy Rating, 261 kWh per year ▪ 266W total connected load ▪ 220-240V/50Hz ▪ Climate class: SN-T
Optional Accessories	▪ CI10Z090 – Stainless steel door handle ▪ FI24Z090 – Stainless steel door panel ▪ CI24Z000 – Stainless steel ventilation grill for right hinged door ▪ CI24Z100 – Stainless steel ventilation grill for left hinged door ▪ CI60Z000 – Installation kit for side-by-side combination ▪ CI60Z100 – Installation kit with heating for side-by-side combination; required when installed with 0.5-16 cm distance

CI24WP00AU aCool Built-in vinoThek Wine Cooler	
Refrigerator Type and Volume	▪ aCool built-in 24" vinoThek wine cooler with 2 temperature zones ▪ 422 litre gross volume
Controls	▪ Electronic temperature control ▪ **LED text display** with 16 different languages ▪ Holiday mode ▪ Sabbath mode ▪ Eco mode ▪ Acoustic door alarm
Comfort	▪ **Glass door with UV-filter** ▪ 2 separate temperature zones, independent controllable from 5˚ to 18˚C ▪ **2 airFresh filters**, one for each temperature zone ▪ Halogen illumination in ceiling ▪ LED presentation light ▪ **Extremely quiet** operation
Shelving and Compartments	▪ 14 bottle shelves on fully extendable telescopic rails, ▪ 98 bottles capacity (0.75 l) ▪ Inner metal liner
Configuration	▪ Right hinged door, reversible to left hinged door ▪ Complete ventilation through plinth ▪ Variable plinth adaption from 102 to 181 mm ▪ Door aperture angle 115˚
Supplied Accessories	
Dimensions (HxWxD)	▪ Appliance: 2125 x 603 x 608 mm ▪ Cut-out: 2134 x 610 x 610 mm
Technical Information	▪ 131W total connected load ▪ 220-240V/50Hz ▪ Climate class: SN-T
Optional Accessories	▪ CI10Z090 – Stainless steel door handle ▪ CI24Z590 – Stainless steel door panel for right hinged door ▪ CI24Z690 – Stainless steel door panel for left hinged door ▪ CI24Z000 – Stainless steel ventilation grill for right hinged door ▪ CI24Z100 – Stainless steel ventilation grill for left hinged door ▪ CI60Z000 – Installation kit for side-by-side combination ▪ CI60Z100 – Installation kit with heating for side-by-side combination; required when installed with 0.5-16 cm distance

Part No.	Description	For models
CI10Z090	Stainless steel door handle	CI24RP00AU CI24WP00AU FI24DP30AU
CI24Z000	Stainless steel ventilation grill for right hinged door	CI24RP00AU CI24WP00AU
CI24Z100	Stainless steel ventilation grill for left hinged door	CI24RP00AU CI24WP00AU
FI24Z300	Stainless steel ventilation grill for left hinged door	FI24DP30AU
FI24Z090	Stainless steel door panel	CI24RP00AU
FI24Z290	Stainless steel door panel	FI24DP30AU
CI24Z590	Stainless steel door panel for right hinged door	CI24WP00AU
CI24Z690	Stainless steel door panel for left hinged door	CI24WP00AU
CI60Z000	Installation kit for side-by-side combination	CI24RP00AU CI24WP00AU FI24DP30AU
CI60Z100	Installation kit with heating for side-by-side combination; needed when installed with 0.5-16 cm distance	CI24RP00AU CI24WP00AU FI24DP30AU
FI50Z000	Water filter	FI24DP30AU

Luxury has two sides. Beside each other

Siemens side-by-side refrigerators are designed to suit all requirements. Packed with clever ideas, smart solutions and lots of storage space, it's what's on the inside – and out – that makes our cooling appliances stand out.

Automatic Ice and Water Dispenser

The Siemens KA58NP70AU side-by-side fridge/freezer includes a water and ice dispenser function that provides freshly made ice-cubes at the touch of a button.

Electronic Control Display Panel

The KA58NP70AU also includes individual electronic temperature controls for both fridge and freezer compartments. The temperature controls are featured on an external LED display panel, providing easy access and accurate temperature control.

Precise electronic controls

The Siemens KA58NP70AU features various types of electronic controls to accurately maintain temperature and promote safe food storage in your fridge and freezer. These controls also give different levels of alarm systems to indicate if the freezer door has been left open or if the internal temperature is too high.

No more defrosting with our frost-free fridge freezers

Our fridge-freezer features frost-free technology, which eliminates the need to defrost. This ensures a permanently cold and dry environment, with no build up of ice in the freezer. This model uses electronics to monitor and control the frost-free operation, ensuring the freezer only initiates the frost-free cycle when the appliance actually needs it, saving in energy consumption.

varioBox

Siemens varioBox offers the ultimate in temperature-controlled storage solutions. The temperature in the varioBox compartment provides different temperature settings for food such as vegetables, fish, and meat and offers the optimum storage conditions.

Super cool function

Adding warm or new food to the fridge can lead to an increase in the internal and food temperatures. Switching on the super cool function ensures a fast and safe cooling of food later added to the fridge, without affecting the temperature of existing food.

Super freeze function

Adding warm or new food to the freezer may lead to part defrosting of pre-frozen items. Like the 'super cool function', super freeze ensures fast and safe freezing of food added to the freezer.

Frost-Free Shower Cooling

The frost-free shower cooling system ensures a uniform and gentle circulation of cold air within the fridge and freezer compartments. Warm food is cooled quicker to retain maximum taste and freshness and is designed to create the optimum in temperature control.

antiBacteria

There's no hiding place for unwanted organisms in our refrigerators. The internal walls include a natural anti-bacterial system that lasts for the lifetime of the appliance.

ANTI BACTERIA

Refrigeration

KA58NP70AU Side-by-side Fridge Freezer	
Refrigerator Type and Volume	▪ Side-by-side fridge freezer ▪ noFrost shower cooling system ▪ 603 litre gross volume (fridge: 377 litre; freezer: 226 litre)
Controls	▪ External electronic temperature controls ▪ Childproof lock setting on electronic controls ▪ Acoustic door alarm
Comfort	▪ Illuminated dispenser for chilled water, crushed ice or ice cubes ▪ extraCool and fastFreeze functions
Shelving and Compartments	▪ 3 safety glass shelves in fridge – 2 are height-adjustable ▪ 1 stainless steel wine bottle rack ▪ 2 transparent crisper drawers ▪ 1 transparent, electronically temperature controlled **varioBox** ▪ 1 dairy compartment with lid ▪ 3 large fridge door shelves ▪ 1 extra large fridge door shelf ▪ 2 transparent freezer drawers ▪ 3 tilting freezer door bins
Configuration	▪ 600 mm counter depth body
Supplied Accessories	▪ Water connection hose ▪ 1 egg rack
Dimensions (HxWxD)	▪ Appliance: 1790 x 903 x 733 mm
Technical Information	▪ 3.5 Star Energy Rating, 760 kWh per year ▪ 300W total connected load ▪ 220-240V/50Hz ▪ Climate class: T
Optional Accessories	

Wine cooler

KF18WA41IE (Left hinged) Built-in vinoThek Wine Cooler	KF18WA40IE (Right hinged) Built-in vinoThek Wine Cooler
Refrigerator Type and Volume	▪ Built-in vinoThek wine cooler ▪ 153 litre gross volume
Controls	▪ Electronic temperature control via LED ▪ Temperature adjustable from 6 ˚ to 14 ˚C
Comfort	▪ Frameless glass door with double insulation ▪ Stainless steel handle ▪ **touchLight**: interior light activated by sensor-touch handle, light dims after door closing ▪ Halogen interior illumination ▪ superCool function ▪ Automatic defrost
Shelving and Compartments	▪ 4 bottle shelves including 3 height-adjustable shelves ▪ 2 additional storage spaces including 1 deli-shelf ▪ 32 bottles capacity (0.75 l) ▪ **antiBacteria** coated cavity
Configuration	▪ **Left hinged door, not reversible (KF18WA41IE)** ▪ **Right hinged door, not reversible (KF18WA40IE)** ▪ Can be installed as a side-by-side solution
Supplied Accessories	
Dimensions (HxWxD)	▪ Appliance: 880 x 560 x 550 mm ▪ Cut-out: 876-880 x 560 x 550 mm
Technical Information	▪ 90W total connected load ▪ 220-240V/50Hz ▪ Climate class: N-ST
Optional Accessories	

wineCooler

Why not protect your prized wines with the Siemens wineCooler? It holds up to 32 bottles at the preferred temperature and gives you the cellar you've always wanted. And with the sensor-touch handle, which illuminates the interior without opening the door, is the perfect finishing touch to the ultimate in wine storage.

No other dishwasher washes as quickly and as thoroughly. Introducing speedMatic; the new dishwasher generation.

Siemens dishwashers are amongst the fastest and most economical in the world, while still achieving perfect dishwashing results. But our engineers always wanted more. That's why they developed a dishwasher generation that defines new standards in terms of speed and thoroughness: speedMatic. This series also achieves a new dimension with additional features, too. With the new varioDrawer, Siemens, for the first time, offers a third loading level for cutlery as well as espresso cups and other small dish parts. And the innovative dosageAssist systematically dissolves and evenly distributes the dishwashing tablet for superior wash performance.

Extremely fast. Extremely thorough. And extremely economical: speedMatic dishwashers from Siemens.

Siemens dishwashers not only stand out in washing up, but in resource efficiency, too. With innovative technology built-in every speedMatic dishwasher, they are designed to help you maximize efficiency without compromising on performance. From as little as 12.3 litres of water, the extra-low water consumption not only lets you save water, but also energy, too.

Dishwashers versus hand washing

Contrary to popular belief, using a dishwasher is considerably more resource efficient than washing dishes by hand. In fact, efficient dishwashers consume significantly less water, detergent and energy and our new range of Siemens speedMatic dishwashers use as little as 12.8 litres of water to wash 15 place settings compared to an average of over 60 litres for manual dishwashing.

ecoSense

Because sensors constantly fine tune the temperature of the water – register when it is dirty and needs changing – they guarantee low water and energy consumption. And, although the dishwasher will automatically get on with the job, you can always tailor the program to a specific need from the extensive array of programs and options available.

halfLoad Plus option

All Siemens speedMatic dishwashers offer the full convenience of a halfLoad wash option. Unlike other systems that restrict the washing zone to just the top or lower basket, the Siemens halfLoad Plus option washes up to seven international place settings stacked anywhere in your dishwasher.

halfLoad Plus

Engineered for silence

Thanks to their special insulation and clever design, Siemens dishwashers are exceptionally quiet. The innovative pump, which pushes the water out of the machine, recognises the amount of remaining water in the dishwasher and turns off when all the water has been removed. This eliminates unpleasant pump noises at the end of the program cycle. Selected Siemens dishwashers perform at only 42 dB, making them super silent.

On conventional dishwashers, the spray arms must clean the detergent from the dispenser located on the inside of the door. This process increases the overall performance noise, created by the water sprayed directly onto the door. The new Siemens speedMatic dishwashers solve this problem with dosageAssist, where the precisely directed water jet sprays up into the special catch tray.

superSilence

Even the door is precision designed

The clever design of the door catch and precision engineering of the spring pressure means that the door can be securely closed with the minimum of effort, virtually creating an automatic closing door.

Faster by design

More and more dishwasher owners are demanding clean dishes but in less time. Because of this we have introduced varioSpeed to our range of built-in dishwashers that will save up to 50% of wash time. Just press the varioSpeed button in conjunction with your desired program and it will run in half the time without compromising on quality. That's clean and dry in half the time.

varioSpeed

Quick reference guide

At Siemens, we have identified that people tend to use the same program repeatedly, regardless of contents. To ensure perfect results each time, your program choice should vary, depending on the items being washed. Thankfully, Siemens dishwashers now have a quick reference guide on the top edge of the door to help you select the most appropriate program and option every time.

How much extra can you pack in? Introducing the varioDrawer.

The varioDrawer is an additional loading level that offers greater loading flexibility. Unlike most ordinary cutlery drawers, its specially designed v-shape provides room for not only cutlery, but also soup ladles, salad servers and small delicate items like espresso cups. Even better, as you no longer need a cutlery basket on the lower rack, it means you can now load up to 15 place settings into varioDrawer models.

varioDrawer

Like everything we build, our dishwashers profit from the best technology and the latest innovations

Testing for quality and durability

All Siemens dishwashers are tested for 20 minutes before leaving the factory. They are tested for safety, function and noise. Furthermore, a percentage of dishwashers are selected and are kept continuously on test in our factory for 24 hours a day on 50°C program for up to 2,200 washes – that's equivalent to 10 years usage. This means you can be assured that your Siemens dishwasher is not only built to last but will continue to do its job perfectly for many years to come.

hydroSafe antiflood protection – even when the dishwasher is turned off

Using the hydroSafe device, Siemens dishwashers are guaranteed to be 100% leak proof, 24 hours a day. If ever a leak occurs, the sensor shuts off the water supply directly at the inlet tap immediately. hydroSafe features on all Siemens dishwashers.

hydroSafe

4.5 star water and up to 4 star energy rating

All dishwashers have to display an energy efficiency label. The aim of this is to offer consumers a standardised method of choosing the most energy efficient appliances. Suffice to say that all Siemens dishwashers are rated 4.5 star water and up to 4 star energy.

Recyclability

Up to 80% of all components in your Siemens dishwasher are designed to be recyclable.

Gentle when it matters and power where you need it. Welcome to the intensiveZone.

How do you clean heavily soiled saucepans and fragile glasses at the same time? Until we invented the intensiveZone option, you didn't. Whatever program you've selected, with intensiveZone, the items in the lower rack are subjected to 20% more spray pressure, which is great for burnt on food and stubborn stains. Whilst on the upper rack, the program you have selected stays unaffected and delicate items like long stemmed wine glasses are washed gently with the care they need.

intensiveZone

rackMatic Plus

The height of the top basket can be adjusted to three different levels, at spaces of 2.5 cm and 5 cm, which offers flexible loading of different types and sizes of plates, glasses and other dishes, even when fully loaded.

rackMatic Plus

varioFlex Plus basket system. Maximum flexibility for your pots and pans, dishes, glasses and cutlery.

varioFlex Plus is an innovative and premium racking system that offers remarkably new levels of comfort and flexibility when loading the upper and lower baskets. A superb glass rack design, for example, lets you stack up to 12 wine glasses in the lower basket and up to six on the upper. What's more, up to six rows of supports can be folded in both the upper and lower baskets to make extra room for pots and pans. And since the depth of the baskets has been increased by 4 cm, there is now even more room. Combine this with the varioDrawer models, and you can achieve 15 place settings.

varioFlex Plus

Perfect control of your wash

hydroSensor helps save even more water during the wash cycle. The sensor works by measuring the amount of soiling after the pre-wash cycle before calculating the appropriate temperature for the main wash. It will also decide if the water can be used again for the main wash, which can save as much as six litres of water.

hydroSensor

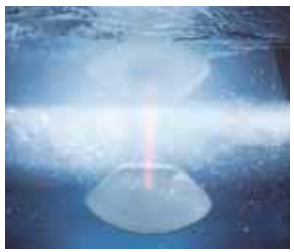

Optimum dishwashing result at the push of a button: automatic program auto 45°C-65°C

The automatic dishwashers from Siemens use state-of-the-art sensor technology to achieve perfect cleaning results. After pressing the automatic key auto 45°C-65°C, the aquaSensor monitors the soiling of the water and controls the amount and time of the water supply, as well as the cleaning temperature, to achieve a perfect result while consuming as little energy and water as possible.

auto 45°-65°
Automatic programme

Quick wash 45°C

The ideal program when you have lightly soiled dishes, the quick wash 45°C program cleans all your dishes in a record 29 minutes.

Quick wash

loadSensor

The loadSensor detects the slightest change in the amount of water running through the machine. Any loss in water (due to putting a cup in the wrong way round, for instance) and the sensor compensates, ensuring that the optimal amount of water is being used at any one time. Since the loadSensor ensures the pump operates at exactly the right speed for the volume of water, it means no air is sucked in, leaving the pump to operate quietly.

Advanced filter system

Siemens' filter system comes in three parts: a fine micro-filter, fine filter and coarse filter. With 50% more surface area between them, they allow up to 15% more water to circulate through the system, providing even more cleaning power.

infoLight

Because our dishwashers are so quiet, it's sometimes difficult to know when the cycle has finished. That's why Siemens developed an infoLight; a red light that shines on your kitchen floor when the dishwasher is operating and disappears when the drying cycle is complete.

info Light

Nothing unleashes the full power of the detergent tablets like dosageAssist

Nowadays tablets are the most commonly used cleaning detergents for dishwashers. Previously, dishwashers had been optimised for the use of powder only. When tablets were used, they would tend to fall into the dishwasher in an uncontrolled manner without always achieving their full effect. This has changed with dosageAssist from Siemens. The dishwashing tablet now falls from the detergent chamber right into a small catch pan at the front of the upper dishwashing rack. A precisely directed water jet controls the dissolving tablet, which is distributed evenly for sparkling results. You can, of course, continue to use powder and gel cleaners with dosageAssist.

dosageAssist

Automatic detergent aware

Whichever detergent types you may want to use, be it powder or multi-function detergent tablets, your dishwasher will automatically sense and adjust the cycle to ensure the best possible results. In fact, there's no need to select a detergent type at all with a Siemens dishwasher.

Automatic Detergent

Large item spray head

Larger items such as baking trays and oven shelves can be washed simply by removing the upper basket and attaching the large item spray head.

hydroDry – the energy-saving feature

The Siemens hydroDry is a perfect example of the intelligent design that is incorporated into our energy management system by using the heat generated in the main wash cavity to preheat water that is later used in the wash cycle. In the final rinse, the hydroDry cleverly uses changes in temperature to leave the dishes hygienically dry – eliminating the need to take air in outside the machine. The hydroDry provides the ultimate care for handling delicate champagne and wine stems by eliminating temperature shock caused by rapid changes in temperature.

A more efficient spray

In Siemens dishwashers, a system of alternately rotating spray arms targeting the upper and lower baskets ensures that water and energy are used efficiently. What's more, the curved spray arms have been fitted with holes pierced at various angles to direct water to all areas of the internal cavity.

For dishes that gleam

The rinse aid sensor is essential for a sparkling finish for your dishes and glasses. All Siemens dishwashers monitor the level of rinse aid and, via LED lights, indicate when the rinse aid compartment needs to be refilled. If you are using a multi-action detergent tablet, which already includes rinse aid, you can manually deactivate the rinse aid function.

Child lock at the push of a button

For added safety, selected Siemens dishwashers can be locked to prevent the opening of the door. The buttons can also be locked to prevent tampering during operation.

Sanitation

Perfect for households with younger children where a higher rinse temperature is required and is ideal for baby bottles, cooking utensils, glass jars, chopping boards, etc.

Don’t settle for the first option. Take the best option.

The dishwasher that fits perfectly under your worktop

Today, design is paramount to any kitchen. It must offer the ultimate in flexibility in order to fulfill your every wish. So whether you want a higher worktop height (above the average 85 cm), Siemens have the perfect dishwasher for you.

XXL tub

Through every stage of the design process, at Siemens we like to think about you.

We have incorporated two taller integrated dishwashers into our range suitable for a worktop height of 86 cm to 92 cm, giving you more flexibility and more interior space, in fact 5 cm more interior space. Taller integrated dishwasher models are; SX66T090AU and SX56T590AU.

Advantages of 5 cm extra interior space

1. By using rackMatic Plus to adjust the upper basket, the 5 cm or 10% extra space in the bottom basket can accommodate larger 35 cm plates.
2. By removing the top basket and fitting the large item spray head, larger items can be washed easily.



81.5cm

Standard height dishwasher

Standard height dishwasher plate sizes



86.5cm
10% more space!

Taller height dishwasher

Taller height dishwasher plate sizes

SX66T090AU Stainless steel fully integrated	
Capacity	▪ 15 international place settings
Consumption rates	▪ Consumption rates based on Normal 45°C program ▪ 4.5 Star Water Rating, 12.8 litres per wash ▪ 4 Star Energy Rating, 245 kWh per year
Design	▪ Sensor buttons ▪ Fully integrated
Dimensions (HxWxD)	▪ Appliance: 865-925 x 598 x 550 mm
Wash Programs	▪ 6 Wash Programs ▪ Auto 65-75°C ▪ Auto 45-65°C ▪ Auto 35-45°C ▪ Normal 45°C ▪ Quick 45°C ▪ Pre-rinse
Performance	▪ Advanced filter system ▪ dosageAssist detergent sensor ▪ Automatic detergent aware ▪ ecoSense technology ▪ hydroSensor ▪ loadSensor ▪ halfLoad Plus ▪ varioSpeed ▪ intensiveZone wash option ▪ Sanitation ▪ hydroDry ▪ Heat Exchanger ▪ 5 Spray levels
Flexibility	▪ Electronic rinse aid/refill indicator ▪ rackMatic Plus height upper basket ▪ tallTUB XXL Cabinet ▪ varioFlex Plus baskets ▪ varioDrawer third loading level ▪ Tall glass/champagne glass racks
Convenience	▪ Time delay start (1-24 hours) ▪ Time remain display ▪ Audible program end signal ▪ infoLight status indicator ▪ superSilence operation (42dB) ▪ Large item spray head
Safety	▪ hydroSafe anti-flood ▪ Child door lock
Power rating	▪ 2400W ▪ 10 amp
Panel Accessories	▪ SZ73055 stainless steel door panel

SX56T590AU Stainless steel semi-integrated	
Capacity	▪ 15 international place settings
Consumption rates	▪ Consumption rates based on Normal 45°C program ▪ 4.5 Star Water Rating, 12.8 litres per wash ▪ 4 Star Energy Rating, 245 kWh per year
Design	▪ Sensor buttons ▪ Semi-integrated
Dimensions (HxWxD)	▪ Appliance: 865-925 x 598 x 573 mm
Wash Programs	▪ 6 Wash Programs ▪ Auto 65-75°C ▪ Auto 45-65°C ▪ Auto 35-45°C ▪ Normal 45°C ▪ Quick 45°C ▪ Pre-rinse
Performance	▪ Advanced filter system ▪ dosageAssist detergent sensor ▪ Automatic detergent aware ▪ ecoSense technology ▪ hydroSensor ▪ loadSensor ▪ halfLoad Plus ▪ varioSpeed ▪ intensiveZone wash option ▪ Sanitation ▪ hydroDry ▪ Heat Exchanger ▪ 5 Spray levels
Flexibility	▪ Electronic rinse aid/refill indicator ▪ rackMatic Plus height upper basket ▪ tallTUB XXL Cabinet ▪ varioFlex Plus baskets ▪ varioDrawer third loading level ▪ tall glass/champagne glass racks
Convenience	▪ Time delay start (1-24 hours) ▪ Time remain display ▪ Audible program end signal ▪ superSilence operation (42dB) ▪ Large item spray head
Safety	▪ hydroSafe anti-flood ▪ Child door lock
Power rating	▪ 2400W ▪ 10 amp
Panel Accessories	▪ SZ73115 stainless steel door and kick panel

Dishwashers

SN56M532AU Stainless steel semi-integrated	
Capacity	▪ 14 international place settings
Consumption rates	▪ Consumption rates based on Normal 45°C program ▪ 4.5 Star Water Rating, 12.3 Litres per wash ▪ 4 Star Energy Rating, 225 kWh per year
Design	▪ Semi-integrated
Dimensions (HxWxD)	▪ Appliance: 815-875 x 598 x 573 mm
Wash Programs	▪ 6 Wash Programs ▪ Auto 45-65°C ▪ Pots and Pans 70°C ▪ Intensive 65°C ▪ Normal 45°C ▪ Quick 45°C ▪ Pre-rinse
Performance	▪ Advanced filter system ▪ dosageAssist detergent sensor ▪ Automatic detergent aware ▪ ecoSense technology ▪ hydroSensor ▪ loadSensor ▪ halfLoad Plus ▪ varioSpeed ▪ intensiveZone wash option ▪ Sanitation ▪ hydroDry ▪ Heat Exchanger ▪ 5 Spray levels
Flexibility	▪ Electronic rinse aid/refill indicator ▪ rackMatic Plus height upper basket ▪ varioFlex baskets ▪ tall glass/champagne glass racks
Convenience	▪ Time delay start (1-24 hours) ▪ Time remain display ▪ superSilence operation (42dB) ▪ Large item spray head
Safety	▪ hydroSafe anti-flood ▪ Button child lock ▪ Child door lock
Power rating	▪ 2400W ▪ 10 amp
Panel Accessories	▪ SZ73115 stainless steel door and kick panel

SN45E502AU Stainless steel built-under	
Capacity	▪ 14 international place settings
Consumption rates	▪ Consumption rates based on Normal 45°C program ▪ 4.5 Star Water Rating, 12.3 Litres per wash ▪ 3.5 Star Energy Rating, 260 kWh per year
Design	▪ Built-under
Dimensions (HxWxD)	▪ Appliance: 815-875 x 598 x 573 mm
Wash Programs	▪ 5 Wash Programs ▪ Pots and Pans 70°C ▪ Intensive 65°C ▪ Normal 45°C ▪ Quick 45°C ▪ Pre-rinse
Performance	▪ Advanced filter system ▪ dosageAssist detergent sensor ▪ Automatic detergent aware ▪ loadSensor ▪ halfLoad Plus ▪ varioSpeed ▪ hydroDry ▪ Heat Exchanger ▪ 5 Spray levels
Flexibility	▪ Electronic rinse aid/refill indicator ▪ rackMatic Plus height upper basket ▪ Vario baskets ▪ Tall glass/champagne glass racks
Convenience	▪ Time delay start (1-24 hours) ▪ Time remain display ▪ whisperQuiet operation (44dB) ▪ Large item spray head
Safety	▪ hydroSafe anti-flood
Power rating	▪ 2400W ▪ 10 amp
Panel Accessories	

Dishwasher accessories

Part No.	Description	For models
SZ73115	Stainless steel door and kick panel to suit semi-integrated dishwashers only	SX56T590AU SN56M532AU
SZ73055 	Stainless steel door panel to suit fully integrated dishwashers only	SX66T090AU
SZ72010	hydroSafe hose extension – extends both inlet and discharge	All models
SZ73001 	Silverware polishing cassette	All models
SZ73100	Cutlery basket	All models

Technical diagrams

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

60 cm Built-in Ovens

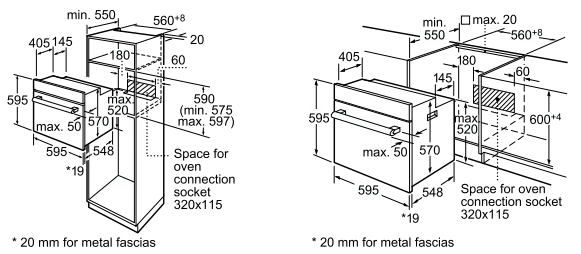

HB78AU570A, HB76AU560A, HB58AU560A, HB56AU550A, HB43AU550A — Measurements in mm

60 cm Built-in Ovens



HB76LU560A — Measurements in mm

60 cm Built-in Ovens



HB76RU560A — Measurements in mm

60 cm Built-in Ovens

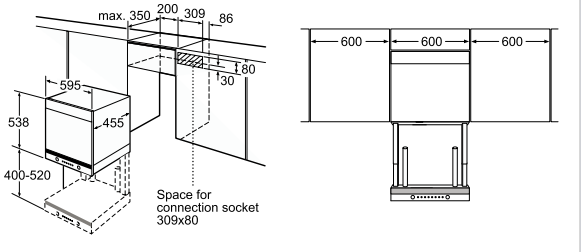

HB76P570E — Measurements in mm

60 cm Built-in Combi-Steam Oven

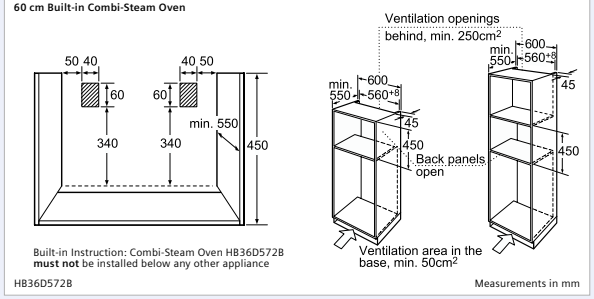

Built-in Instruction: Combi-Steam Oven HB36D572B **must not** be installed below any other appliance

HB36D572B — Measurements in mm

60 cm Built-in Combi-Microwave Oven

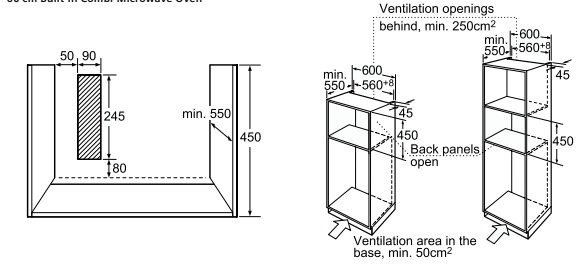

HB86P572B, HB86K572B — Measurements in mm

60 cm Built-in Microwave Oven





HF35M562B — Measurements in mm

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

60 cm Built-in Microwave Oven

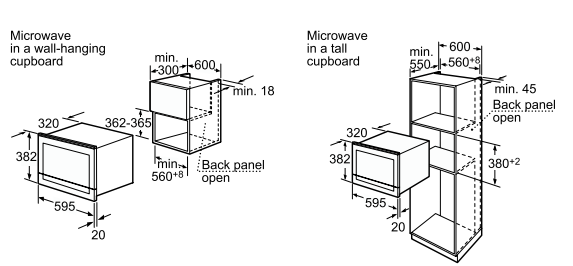

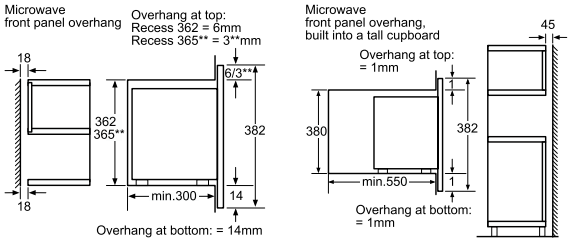

HF25M5L2B — Measurements in mm

60 cm Built-in Warming Drawer





Ovens with a height of 595 mm can be installed above a warming drawer in the HW 290 range. An intermediate floor is not required.

HW290562B — Measurements in mm

Fully Automatic Built-in Coffee Machine



An installation height >950 mm makes it difficult to fill the containers for beans and water which



The fully automatic espresso machine can be fitted above a warming drawer. An inter mediate floor is not required.



An installation height >950 mm makes it difficult to fill the containers for beans and water which are fitted on the top.

Fully automatic espresso machine
left-hand corner installation
right-hand corner installation



TK76K572 — Measurements in mm

60 cm Built-in Warming Drawer





Compact appliances with a height of 454 mm can be installed above a warming drawer in the HW 140 range. An intermediate floor is not required.

HW1405A2, HW1405P2B — Measurements in mm

Technical diagrams

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

Installation requirements for Induction Cooktops only

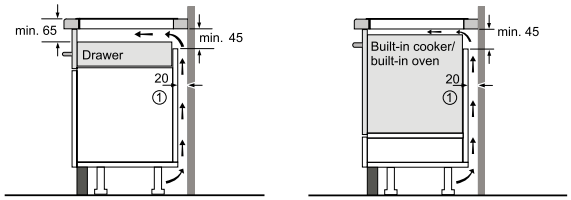

① Ventilation gap must be present.

Measurements in mm

90 cm Induction Cooktop



* Minimum distance from the hob cut-out to the wall

** Maximum recessed depth

EH975ME11E

Measurements in mm

90 cm Induction Cooktop

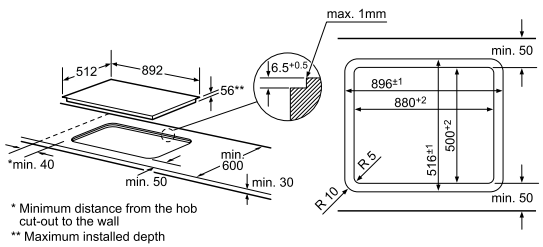

* Minimum distance from the hob cut-out to the wall

** Maximum installed depth



EH901SK11

Measurements in mm

90 cm Induction Cooktop



* Minimum distance from the hob cut-out to the wall

** Maximum installed depth

*** Min. 30 with a fitted oven underneath



EH975MD21E

Measurements in mm

80 cm Ceramic Cooktop



* Minimum distance from the hob cut-out to the wall

** Maximum installed depth

ET875MC21D

Measurements in mm

60 cm Induction Cooktop



* Minimum distance from the hob cut-out to the wall

** Maximum installed depth

*** Min. 30 with a fitted oven underneath



EH675ME21E, EH675MD21E

Measurements in mm

60 cm Ceramic Cooktop



* Minimum distance from the hob cut-out to the wall

** Maximum recessed depth

ET675MG21DE

Measurements in mm

90 cm Gas Cooktop



* Minimum distance from the hob cut-out to the wall

** Position of the gas connection in the cut-out

ER926SB90A

Measurements in mm

90 cm Gas Cooktop



* Minimum distance from the hob cut-out to the wall

** Position of the gas connection in the cut-out

EC945RB90A

Measurements in mm

60 cm Gas Cooktop



* Minimum distance from the hob cut-out to the wall

** Position of the gas connection in the cut-out

ER626PB90A

Measurements in mm

60 cm Gas Cooktop



ER14953AU

Measurements in mm

40 cm Teppanyaki Plate



* Minimum distance from the hob cut-out to the wall

** Maximum recessed depth

ET475MY11E

Measurements in mm

40 cm BBQ Grill



* Minimum distance from the hob cut-out to the wall

ET475MU11E

Measurements in mm

30 cm Induction Cooktop



* Minimum distance from the hob cut-out to the wall

** Maximum installed depth



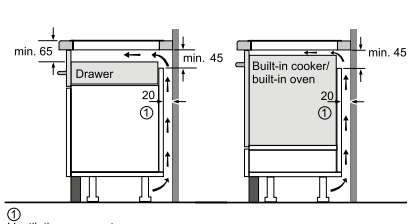

① Ventilation gap must be present.

EH375ME11E

Measurements in mm

30 cm Ceramic Cooktop



* Minimum distance from the hob cut-out to the wall

** Maximum recessed depth

ET375MF11E

Measurements in mm

30 cm Gas Cooktop



* Minimum distance from the hob cut-out to the wall

** Position of the gas connection in the cut-out

ER326BB90A

Measurements in mm

30 cm Wok Gas Cooktop



* Minimum distance from the hob cut-out to the wall

** Position of the gas connection in the cut-out

ER326AB90A

Measurements in mm

Technical diagrams

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

Installation requirements for Domino Cooktops

Assembly kit (HZ394301)
for Domino

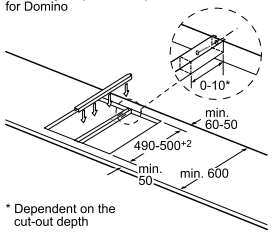

* Dependent on the
cut-out depth

Picture for the table Domino combination possibilities with corresponding devices and cutout dimensions

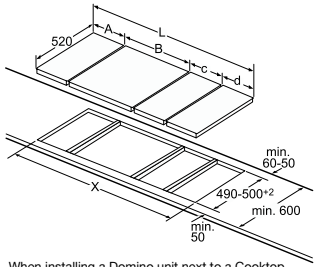

When installing a Domino unit next to a Cooktop or when installing two or more Domino units side-by-side one or more assembly kits (HZ394301) are required (2 units = 1 assembly kit, 3 units = 2 assembly kit, etc.).

Cutout dimension (X) depending on the combination see table:

Domino combination possibilities with corresponding device and cutout dimensions

Width type:	30	40	60	70	80	90
Device width:	302	392	602	710	812	912

	A	B	C	D	L	X
2x30	302	302	-	-	604	**572**
1x30, 1x40	302	392	-	-	694	**662**
1x30, 1x60	302	602	-	-	904	**872**
1x30, 1x70	302	710	-	-	1012	**980**
1x30, 1x80	302	812	-	-	1114	**1082**
1x30, 1x90	302	912	-	-	1214	**1182**
2x40	392	392	-	-	784	**752**
1x40, 1x60	392	602	-	-	994	**962**
1x40, 1x70	392	710	-	-	1102	**1070**
1x40, 1x80	392	812	-	-	1204	**1172**
1x40, 1x90	392	912	-	-	1304	**1272**
3x30	302	302	302	-	906	**874**
2x30, 1x40	302	302	392	-	996	**964**
2x30, 1x60	302	302	602	-	1206	**1174**
2x30, 1x70	302	302	710	-	1314	**1282**
2x30, 1x80	302	302	812	-	1416	**1384**
2x30, 1x90	302	302	912	-	1516	**1484**
1x30, 2x40	302	392	392	-	1086	**1054**
1x30, 1x40, 1x60	302	392	602	-	1296	**1264**
1x30, 1x40, 1x70	302	392	710	-	1404	**1372**
1x30, 1x40, 1x80	302	392	812	-	1506	**1474**
1x30, 1x40, 1x90	302	392	912	-	1606	**1574**
3x40	392	392	392	-	1176	**1144**
2x40, 1x60	392	392	602	-	1386	**1354**
4x30	302	302	302	302	1208	**1176**
3x30, 1x40	302	302	302	392	1298	**1266**
2x30, 2x40	302	302	392	392	1388	**1356**
1x30, 3x40	302	392	392	392	1478	**1446**

Measurements in mm

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

90 cm Wall Mounted Canopy Rangehood with Glass Screen













LC955KA40

Measurements in mm

100 cm Island Canopy Rangehood with Glass Screen













LF157GA60

Measurements in mm

Technical diagrams

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

90 cm Wall Mounted Canopy Rangehood











LC958BA90 Measurements in mm

90 cm Wall Mounted Canopy Rangehood











LC958BB60 Measurements in mm

90 cm Wall Mounted Canopy Rangehood











LC958WA60 Measurements in mm

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

73 cm Integrated Rangehood

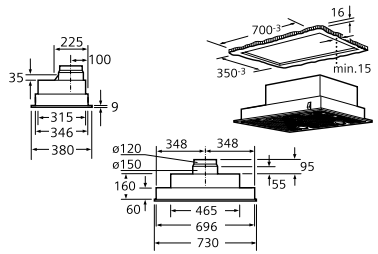

LB75564 Measurements in mm

60 cm Slideout Rangehood

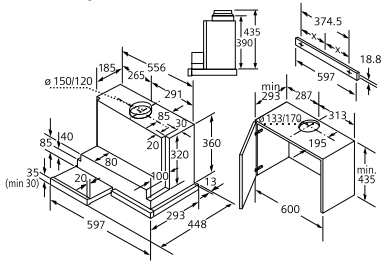

LI49632, LI46630 Measurements in mm

90 cm Slideout Rangehood

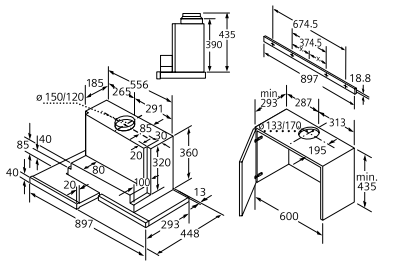



LI48932 Measurements in mm

Stainless steel fully integrated Dishwasher



* Because of height-adjustable screw feet:
when appliance height is 865, base height is 90-160mm
when appliance height is 925, base height is 150-220mm

SX66T090AU Measurements in mm

Stainless steel semi-integrated Dishwasher



** Stainless steel fascia up to max. 143mm
* Because of height-adjustable screw feet:
when appliance height is 865, base height is 90-160mm
when appliance height is 925, base height is 150-220mm

SX56T590AU Measurements in mm

Stainless steel semi-integrated Dishwasher



** Stainless steel fascia up to max. 143mm
* Because of height-adjustable screw feet:
when appliance height is 815, base height is 90-160mm
when appliance height is 875, base height is 150-220mm

SN56M532AU Measurements in mm

Stainless steel built-under Dishwasher



* Because of height-adjustable screw feet:
when appliance height is 815, base height is 90mm
when appliance height is 875, base height is 150mm

SN45E502AU Measurements in mm

Technical diagrams

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

Side-by-side Fridge Freezer



KA58NP70AU Measurements in mm

Built-in vinoThek Wine Cooler



KF18WA41IE, KF18WA40IE Measurements in mm

aCool Built-in 24" Freezer

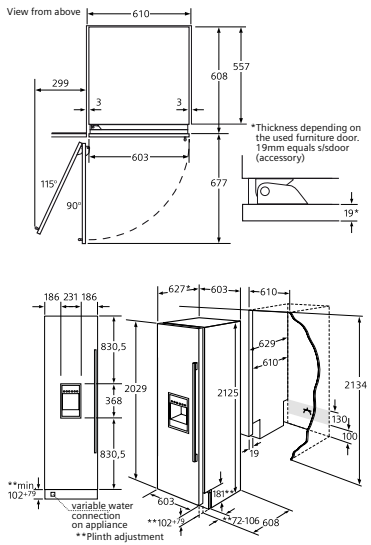

FI24DP30AU Measurements in mm

aCool Built-in 24" Refrigerator

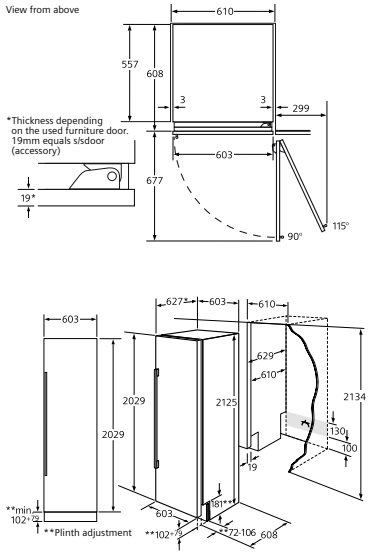

CI24RP00AU Measurements in mm

aCool Built-in 24" vinoThek Wine Cooler

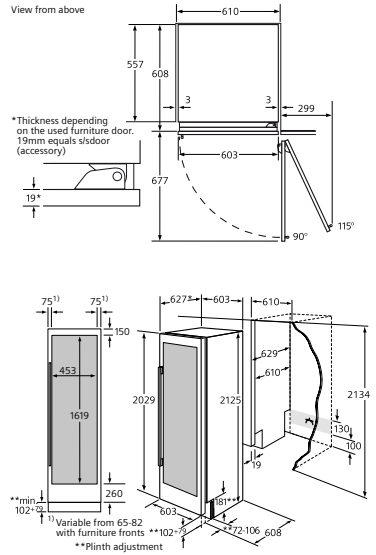

CI24WP00AU Measurements in mm

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

aCool configurations

Siemens have created a series of combinations that showcase the new series of aCool appliances. They can be installed individually or grouped together with other aCool modules to provide you with the freedom to perfectly coordinate your refrigeration requirements.

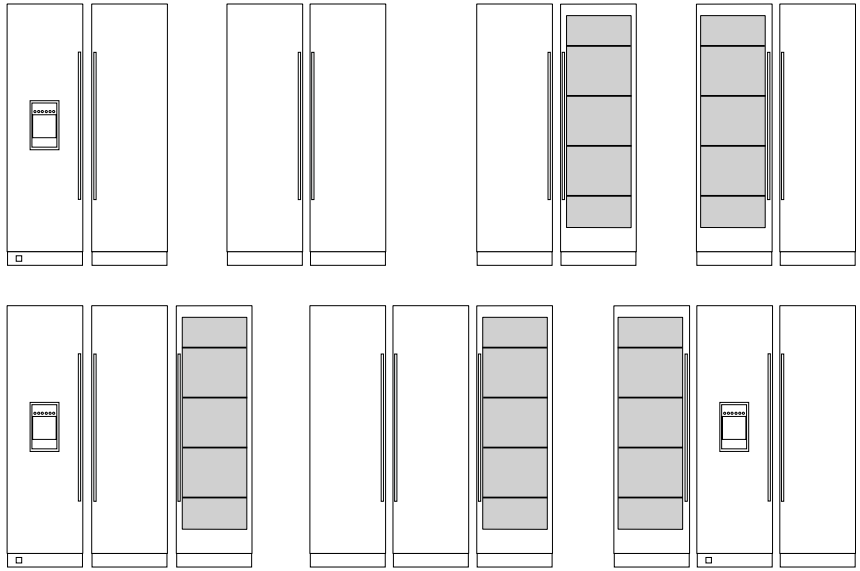

Contact Siemens.

Your local Siemens dealer will be pleased to provide more detailed information and advise you on your choice of appliance. However, if you have questions or comments about any of our appliances, we would be pleased to hear from you.

Siemens customer care.
Quality service for quality appliances.

Product advice

1300 368 339

This is the number to call for all additional information regarding Siemens appliances, including pre-sales advice and user-related queries. Many of your questions can be answered via the Siemens catalogue or by visiting our website.

Spare parts and accessories

1300 360 447

Remember, we keep spare parts for all Siemens appliances, even discontinued ones for at least ten years.

Service requests

1300 368 339

Our extensive network of authorised service engineers are fully equipped to carry out home visits. We keep a ten-year supply of major components for all our appliances – because we know they last at least that long.

Product information

1300 368 339

To receive additional Siemens product information, call our customer care line or visit our website.

Website

www.siemens-home.com.au

Our website has a wealth of useful information on our product ranges. It gives you all the in-depth product details in one place so it's ideal for comparing products directly. This is also where you can register your product warranty.